


MSC Series

200 AMP - MULTI POSITION STUD TYPE 400 Amp Mains c/w Blank Wiring Comp.



METER
SOCKETS



CATALOGUE #	DESCRIPTION	METER POSITIONS	ENCLOSURE SIZE A X B X C	WEIGHT
MSC42TW	2 gang, c/w 1/2" compression studs	2	22 ³ / ₄ " x 6 ¹ / ₄ " x 28"	48 lbs.
MSC43TW	3 gang, c/w 1/2" compression studs	3	22 ³ / ₄ " x 6 ¹ / ₄ " x 37 ³ / ₈ "	65 lbs.
MSC44TW	4 gang, c/w 1/2" compression studs	4	22 ³ / ₄ " x 6 ¹ / ₄ " x 46 ³ / ₄ "	83 lbs.
MSC45TW	5 gang, c/w 1/2" compression studs	5	22 ³ / ₄ " x 6 ¹ / ₄ " x 56 ¹ / ₈ "	103 lbs.
MSC46TW	6 gang, c/w 1/2" compression studs	6	22 ³ / ₄ " x 6 ¹ / ₄ " x 65 ¹ / ₂ "	121 lbs.

* Also available with two (2) blank compartments (see MSC800 Series)

- Factory Bussed 400 Amp Mains
- 200 Amp, 600 VOLT per position
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- CSA weatherproof enclosure 3
- Approved conductor range:
Line - studs (1/2" per phase) provided
for compression type wire connectors
Load - #6 - 250 MCM CU/AL
- Underground only

- Use SXX503 for 5th jaw at 9 O'clock
- Use SXC022 for water heater lug kit

KNOCKOUT CODE	CONDUIT SIZE
G	1 ¹ / ₄ ", 1 ¹ / ₂ ", 2", 2 ¹ / ₂ "
S	3", 3 ¹ / ₂ ", 4"
AA	1 ¹ / ₂ "

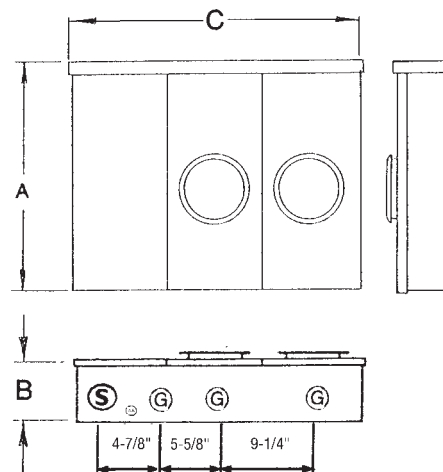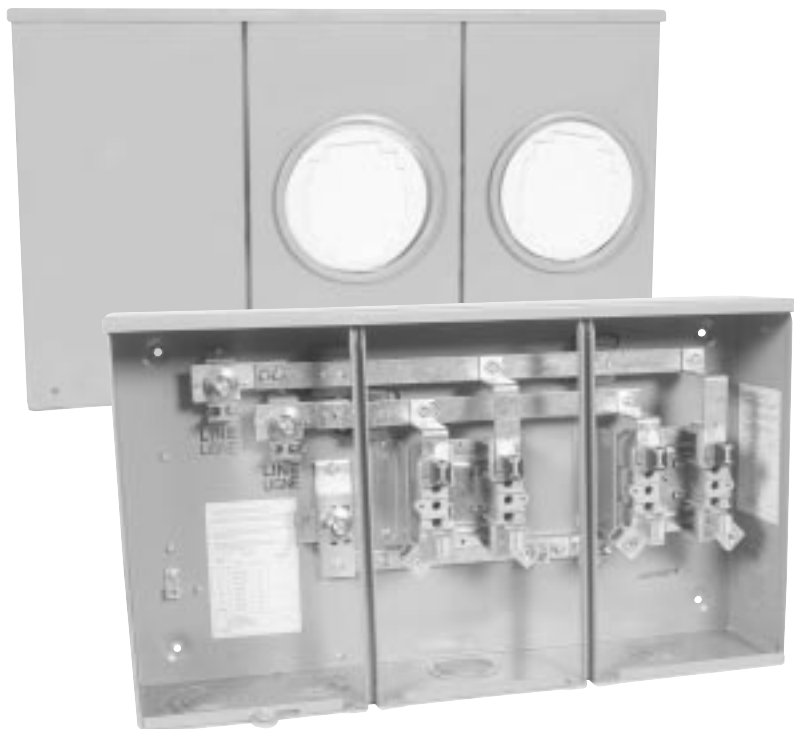

Brampton Hydro approved units available with 4 1/2" studs per phase. Add suffix -2 to above numbers.