

ACT20M-RTI-AO-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Version	Temperature converter, With galvanic isolation, Input : Temperature, PT100, Output : I / U
Order No.	1375510000
Type	ACT20M-RTI-AO-S
GTIN (EAN)	4050118259667
Qty.	1 pièce(s)

ACT20M-RTI-AO-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques**Dimensions and weights**

Depth	114,3 mm	Depth (inches)	4,5 inch
Height	112,5 mm	Height (inches)	4,429 inch
Width	6,1 mm	Width (inches)	0,24 inch
Net weight	89 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...70 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	40 °C / 95 % rel. humidity, no condensation

Probability of failure

MTBF	152 a
------	-------

Input

Influence of the sensor cable resistance	<0.002 Ω/Ω (@ 3/4-wire)	Line resistance in measuring circuit	≤ 50 Ω
Number of inputs	1	Sensor	PT100 (2-/3-/4- wire)
Temperature input range	Configurable, PT100: -200...+850 °C, min. measurement range 10°C (RTD)		

Output

Load impedance current	≤ 600 Ω	Number of outputs	1
Output current	configurable, 0...20 mA, 4...20 mA	Output signal limit	<4 mA (average), <60 mA (pulse current), low duty cycle
Output voltage, note	configurable, 0(2)...10 V, 0(1)...5 V	Type	active, connected control must be passive
Wire break detection	Yes, Configurable, 3.5 mA / 23 mA / none	load impedance voltage	≥ 10 kΩ

General data

Accuracy	absolute accuracy: <±0.05 % of the measurement range, Basic accuracy: <±0.1°C	
Configuration	DIP switch	
Delivery state	Input: 0 °C // Bandwidth: 50 Hz // Output 1: 0...20 mA // Output 2: 0...20 mA // Sensor error detection: enabled // Step response time: < 30 ms // Noise suppression: enabled	
Delivery state	Setting parameters	Input
	Configuration	0 °C
	Setting parameters	Bandwidth
	Configuration	50 Hz
	Setting parameters	Output 1
	Configuration	0...20 mA
	Setting parameters	Output 2
	Configuration	0...20 mA
	Setting parameters	Sensor error detection
	Configuration	enabled
	Setting parameters	Step response time
	Configuration	< 30 ms
	Setting parameters	Noise suppression
	Configuration	enabled
Galvanic isolation	3-way isolator	

Date de création 26 novembre 2024 13:18:30 CET

Niveau du catalogue 26.11.2024 / Toutes modifications techniques réservées

ACT20M-RTI-AO-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Included in delivery	Instruction sheet
Power consumption, max.	0,7 W
Power consumption, typ.	0,49 W
Protection degree	IP20
Rail	TS 35
Step response time	Configurable, ≤ 30 ms, <300 ms
Temperature coefficient	≤0.01 % of the measurement range/°C or 0.02 °C/°C
Voltage supply	24 V DC ±30 % at terminal or via CH20M rail bus

Insulation coordination

EMC standards	IEC 61326-1	Galvanic isolation	3-way isolator
Insulation voltage	2.5 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V _{eff}	Surge voltage category	II

Data for Ex applications (ATEX)

Installation location	Device installed in safe area, zone 2	Marking	II 3 G Ex nA IIC T4 Gc
-----------------------	---------------------------------------	---------	------------------------

Connection data

Type of connection	Screw connection	Tightening torque, min.	0,4 Nm
Tightening torque, max.	0,6 Nm	Clamping range, rated connection	2,5 mm ²
Clamping range, min.	0,5 mm ²	Clamping range, max.	2,5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

EMC conformity and approvals

EMC standards	IEC 61326-1	Standards	IEC 61010-1
---------------	-------------	-----------	-------------

Classifications

ETIM 6.0	EC002919	ETIM 7.0	EC002919
ETIM 8.0	EC002919	ETIM 9.0	EC002919
ECLASS 9.0	27-21-01-29	ECLASS 9.1	27-21-01-29
ECLASS 10.0	27-21-01-29	ECLASS 11.0	27-21-01-29
ECLASS 12.0	27-21-01-29	ECLASS 13.0	27-21-01-29
ECLASS 14.0	27-21-01-29		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

Important note

Product information	The ACT20M-RTI-AO-S configurable temperature transducer isolates and converts analogue signals. An analogue RTD input signal (Type Pt100) is linearly converted into an analogue output signal and galvanically isolated. The power supply is galvanically isolated from the input and output (3-way isolation) and this is done with direct wiring or over the Weidmüller rail bus.
---------------------	--

ACT20M-RTI-AO-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Approvals

Approvals



IECEX



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

Downloads

Approval/Certificate/Document of Conformity	DNV-GL certificate FM certificate IECEX certificate ATEX certificate UL certification for canada Declaration of Conformity
Engineering Data	CAD data – STEP
Software	DIP switch configuration tool
User Documentation	instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	


ACT20M-RTI-AO-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Dessins

Connection diagram

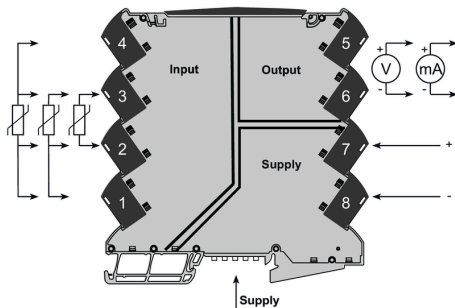

Dimensional drawing

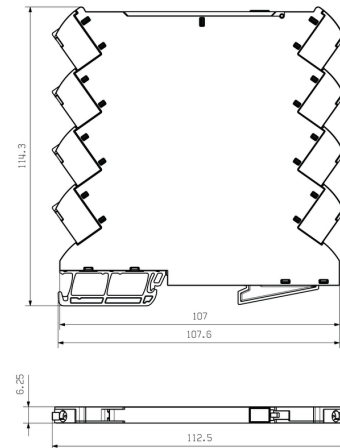

DIP switch setting


		Temperature range [°C]																	
		PT100: -200 ~ +850 °C																	
RTD sensor type	S1	Min.	S2	Max.	Temp.		S2	S3	S4	S5	S6	S7	S8	S9	Max.	S2	Temp.		S2
		Temp.	Temp.	Temp.	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C	°C
PT100 2-wire	☒	-200	☒	200	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	200	☒	-200	☒	200
PT100 3-wire	☒	-100	☒	100	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	100	☒	-100	☒	100
PT100 4-wire	☒	-50	☒	50	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	50	☒	-50	☒	50
PT100 5-wire	☒	0	☒	0	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	0	☒	0	☒	0
Output	☒	-200	☒	200	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	200	☒	-200	☒	200
200 ~ 250 mA	☒	-200	☒	200	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	200	☒	-200	☒	200
4 ~ 20 mA	☒	-100	☒	100	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	100	☒	-100	☒	100
0 ~ 10 V	☒	-50	☒	50	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	50	☒	-50	☒	50
2 ~ 10 V	☒	0	☒	0	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	0	☒	0	☒	0
0 ~ 10 V	☒	0	☒	0	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	0	☒	0	☒	0
1 ~ 5 V	☒	0	☒	0	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	0	☒	0	☒	0
0 ~ 10 V	☒	0	☒	0	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	0	☒	0	☒	0
Sensor error detection	☒	20	☒	20	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	20	☒	20	☒	20
noise	☒	20	☒	20	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	20	☒	20	☒	20
enabled	☒	10	☒	10	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	10	☒	10	☒	10
Output error level	☒	100	☒	100	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	100	☒	100	☒	100
downscale	☒	50	☒	50	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	50	☒	50	☒	50
upscale	☒	50	☒	50	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	50	☒	50	☒	50
noise suppression	☒	100	☒	100	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	100	☒	100	☒	100
60 Hz	☒	100	☒	100	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	100	☒	100	☒	100
Response time	☒	10	☒	10	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	10	☒	10	☒	10
≤ 3 ms	☒	10	☒	10	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	10	☒	10	☒	10
≤ 500 ms	☒	10	☒	10	☒	☒	0	☒	☒	☒	☒	☒	☒	☒	10	☒	10	☒	10

■ = ON

example for DIP switch setting
(with ACT20M tool software)



Additional power supply option via bus

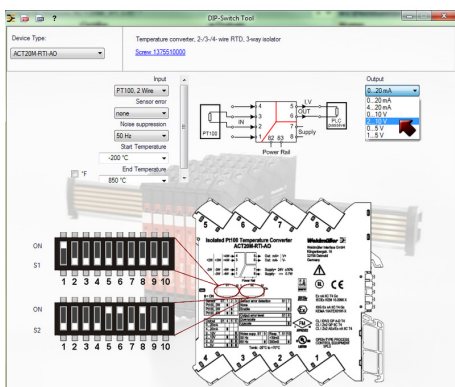

example for DIP switch setting (with ACT20 tool)