



# MT/MQ/MQM Series

Micro tungsten lamps, micro-quartz lamps or MR16 lamps

Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_


## FEATURES

- Compact design
- 6, 12 and 24V with various wattages
- Variable light patterns using adjustable lens
- Fire-retardant thermoplastic
- Available with tungsten, quartz lamps or MR16
- 300° rotation
- CSA certified to C22.2 No. 141



## DIMENSIONS

Dimensions are approximate and subject to change.

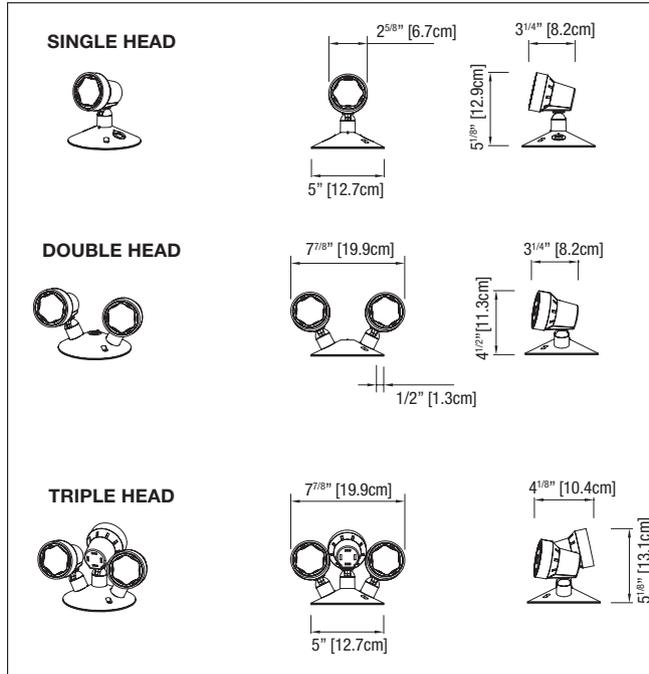

## TYPICAL SPECIFICATIONS

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic and shall require no tool for aiming or adjustment. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be designed to allow for lamp replacement if required.

The remote unit shall be the Lumacell® model: \_\_\_\_\_.

## WIRE GUARDS

460.0029-L	Wall ceiling Mount
------------	--------------------

## REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
580.0015-L	Halogen (quartz)	12V-12W
580.0097-L	MR16 LED	6V-4W
580.0093-L	MR16 LED	12V-4W
580.0104-L	MR16 LED	24V-4W
580.0098-L	MR16 LED	12V-5W
580.0106-L	MR16 LED	12V-6W
580.0100-L	MR16 LED	24V-6W

See the complete list p. 144 to 146.

## ORDERING INFORMATION

SERIES	LAMP TYPE	NUMBER OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	COLOURS	
M= micro, PAR 18	T= tungsten, wedge base Q= halogen, quartz bi-pin QM= halogen, MR16 LED	1= single head 2= double head 3= triple head	6V9W= 6V-9W tungsten, wedge base 12V9W= 12V-9W tungsten, wedge base 12V18W= 12V-18W tungsten, wedge base 24V9W= 24V-9W tungsten, wedge base 24V18W= 24V-18W tungsten, wedge base 6V8W= 6V-8W, quartz bi-pin 6V12W= 6V-12W, quartz bi-pin 12V8W= 12V-8W, quartz bi-pin 12V12W= 12V-12W, quartz bi-pin 6V6W= 6V-6W, MR16	6V10W= MR16, 6V-10W 12V12W= MR16, 12V-12W 12V20W= MR16, 12V-20W 24V12W= MR16, 24V-12W LD1= MR16 LED, 6V-4W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W	Blank= factory white BK= black

EXAMPLE: MT16V9W