

BCH2MR2023CF6C

servo motor BCH, Lexium 28, 180mm, 2000W, 27kg.cm², with oil seal, with key, brake, straight connection



Main

Range Compatibility	Lexium 28
Product or Component Type	Servo motor
Device short name	BCH2

Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V
Phase	Three phase
Continuous stall current	8.75 A
Continuous stall torque	84.52 Lbf.in (9.55 N.m) LXM26D 12 A, 220 V, three phase 84.52 Lbf.in (9.55 N.m) LXM28... 12 A, 220 V, three phase 84.52 lbf.in (9.55 N.m)
Continuous power	2000 W
Peak stall torque	253.57 Lbf.in (28.65 N.m) LXM26D 12 A, 220 V, three phase 253.57 Lbf.in (28.65 N.m) LXM28... 12 A, 220 V, three phase 253.57 lbf.in (28.65 N.m)
Nominal output power	2000 W LXM26D 12 A, 220 V, three phase 2000 W LXM28... 12 A, 220 V, three phase 2000 W
Nominal torque	84.52 Lbf.in (9.55 N.m) LXM26D 12 A, 220 V, three phase 84.52 Lbf.in (9.55 N.m) LXM28... 12 A, 220 V, three phase 84.52 lbf.in (9.55 N.m)
Nominal speed	2000 rpm 2000 rpm LXM26D 12 A, 220 V, three phase 2000 rpm LXM28... 12 A, 220 V, three phase
Maximum current Irms	35.4 A 2 kW, 220 V 35.4 A LXM28... 2 kW, 220 V
Maximum permanent current	9.6 A
Product compatibility	LXM26D servo drive 2 kW, 220 V, three phase LXM28... servo drive 2 kW, 220 V, three phase
Shaft end	Keyed
Shaft diameter	1.38 in (35 mm)
Shaft length	3.11 in (79 mm)
Key width	0.39 in (10 mm)
Feedback type	20 bits single turn absolute encoder
Holding brake	With
Holding torque	424.84 lbf.in (48 N.m) built-in
Mounting Support	Asian standard flange
Motor flange size	7.09 in (180 mm)
Electrical connection	Connector MIL
Torque constant	1.09 N.m/A 68 °F (20 °C)

Back emf constant	66 V/krpm 68 °F (20 °C)
Rotor inertia	27 kg.cm²
Stator resistance	0.572 Ohm 68 °F (20 °C)
Stator inductance	8.86 mH 68 °F (20 °C)
Stator electrical time constant	15.49 ms 68 °F (20 °C)
Maximum radial force Fr	1200 N 2000 rpm
Maximum axial force Fa	497 N
Brake pull-in power	49.6 W
Type of cooling	Natural convection
Length	7.99 in (203 mm)
Number of motor stacks	1
Centring collar diameter	4.50 in (114.3 mm)
Centring collar depth	0.16 in (4 mm)
Number of mounting holes	4
Mounting holes diameter	0.53 in (13.5 mm)
Circle diameter of the mounting holes	7.87 in (200 mm)
Distance shaft shoulder-flange	0.16 in (4 mm)
Net Weight	39.68 lb(US) (18 kg)

Environment

IP Degree of Protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)


Ordering and shipping details

Category	18281-LEXIUM 23/28 MOTORS
Discount Schedule	PC53
GTIN	3606480734755
Returnability	No
Country of origin	CN

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.65 in (24.5 cm)
Package 1 Width	11.42 in (29 cm)
Package 1 Length	23.03 in (58.5 cm)
Package 1 Weight	692.42 oz (19630 g)
Unit Type of Package 2	P06
Number of Units in Package 2	4
Package 2 Height	19.69 in (50 cm)
Package 2 Width	31.50 in (80 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	199.96 lb(US) (90.7 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes

China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes


Dimensions of Motor

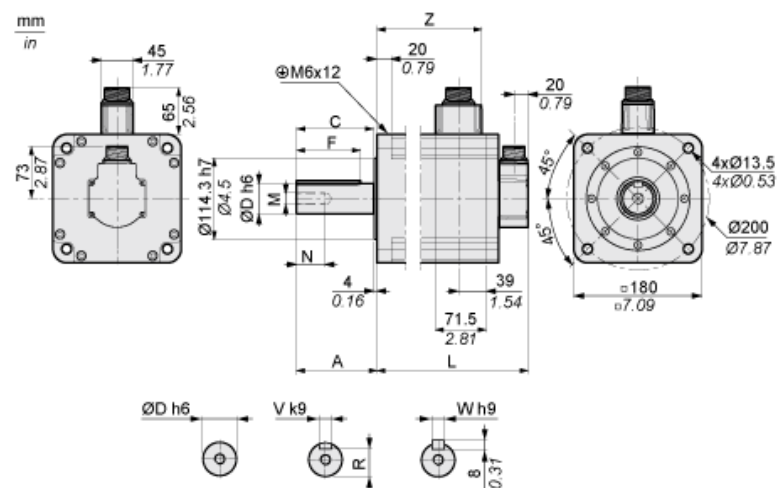

	mm	in.
L (without holding brake)	169	6.65
L (with holding brake)	203	7.99
A	79	3.11
C	73	2.87
D	35	1.38
F	63	2.48
N	28	1.10
M	M12	
R	30	1.18
V	10	0.39
W	10	0.39
Z	103	4.06

Torque/Speed Curves with 230 V Three Phase Supply Voltage

Servo Motor with LXM28AU20●●● Servo Drive

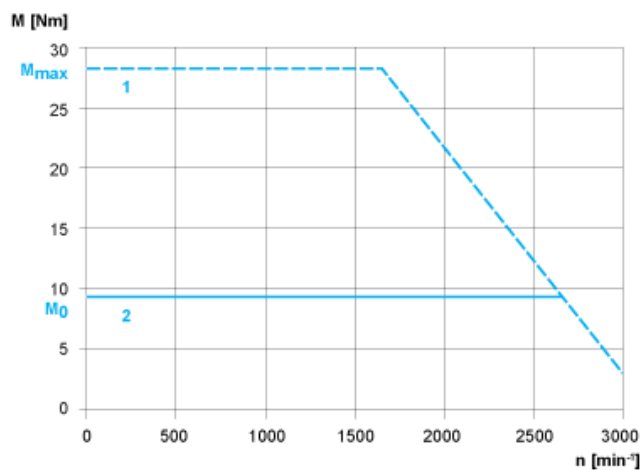

- 1 : Peak torque
2 : Continuous torque