


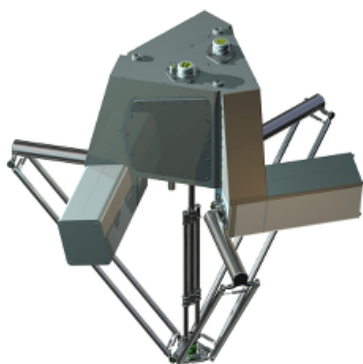

Main

Range of product	Lexium P, T
Product or component type	Delta 3 robot
Device short name	P4
Design	Standard

Complementary

Number of axis	3...4
Work envelope	0.00...47.24 in (0...1200 mm) diameter 0.00...16.73 in (0...425 mm) vertical
Repeat accuracy	0.1 mm
Permanent permissible load	33.07 lb(US) (15 kg)
Maximum actuation speed	32.81 ft/s (10 m/s)
Maximum acceleration	328.08 ft/s ² (100 m/s ²) at 1 kg 246.06 ft/s ² (75 m/s ²) at 1.5 kg
Net weight	253.53 lb(US) (115 kg)
Range compatibility	Lexium SH3 motor

Environment

Environmental characteristic	Dust pollution resistance High pressure cleaner Normal environment
------------------------------	--

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	302.03 lb(US) (137 kg)
Package 1 Height	33.46 in (85 cm)

Package 1 width	39.37 in (100 cm)
Package 1 Length	47.24 in (120 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
PVC free	Yes