

Product data sheet

Characteristics

XZCRV1511041C1

jumper cable XZ - male straight M12 4-pin -
female straight M12 4-pin - PVC 1m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight screw-on
Collar material	Metal
Cable composition	4 x 0.25 mm ²
Cable length	3.28 ft (1 m)
Wire insulation material	PVC
Cable outer diameter	0.18 in (4.6 mm)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.15 lb(US) (0.07 kg)

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.08 oz (59 g)
Package 1 Height	0.59 in (1.5 cm)

Package 1 width	5.12 in (13 cm)
Package 1 Length	5.51 in (14 cm)
Unit Type of Package 2	BAG
Number of Units in Package 2	1
Package 2 Weight	2.08 oz (59 g)
Package 2 Height	0.59 in (1.5 cm)
Package 2 width	4.33 in (11 cm)
Package 2 Length	5.12 in (13 cm)
Unit Type of Package 3	S02
Number of Units in Package 3	50
Package 3 Weight	7.51 lb(US) (3.405 kg)
Package 3 Height	5.91 in (15 cm)
Package 3 width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

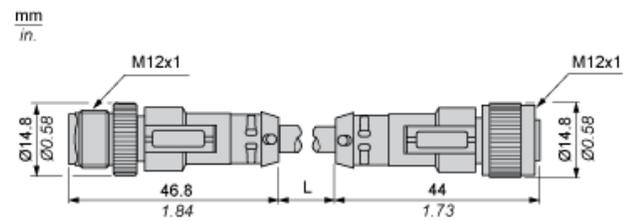

L : Length of cable

Connections and Schemes

