

W16Q-L

Project:

Contractor:

2 IN 1 LED WALL PACK (SURFACE MOUNT/ CONDUIT FEED) 22W (1830 Lumens)

IP RATING
65



Approvals:
cULus listed
Suitable for wet locations



Surface mounting shown



Conduit mounting shown


DESCRIPTION

The designed and versatile W16Q-L is a highly efficient LED wall mount luminaire. This fixture is supplied with a photocell (120V), a wall bracket (for surface mounting), and a wiring box (for feed-through mounting). This fixture is best suited for entrances, underpasses, or anywhere controlled security lighting is required. The W16Q-L is made of tough die cast aluminum housing and is IP65 rated. This fixture also has the option of adding a 1/2" fitter, a slipfitter or trunion for flood lighting.

TECHNICAL SPECIFICATIONS

- Die Cast Aluminum housing
- Integrated photocell (120V)
- Bronze UV resistant powder coat finish
- Input voltage: 120V AC standard (208-277V and 347V AC optional)
- High quality, long life LEDs
- Estimated lifespan of 50,000 hours
- 22 Watts offers 1830 total lumens
- 5000K colour temperature
- Low starting temperature of -40°C

DIMENSIONS

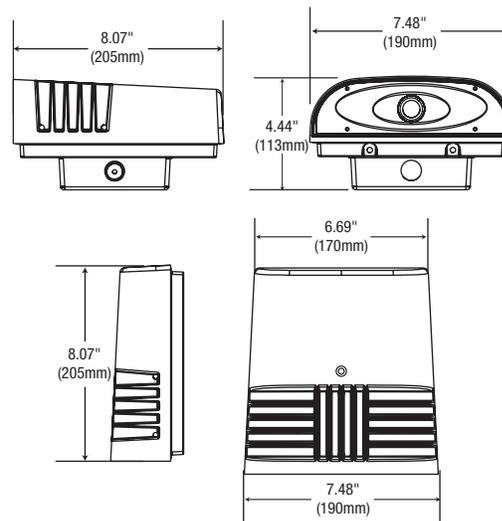

QUICK SHIP ORDERING GUIDE*

Part number	Casting colour	Wattage	Lumens	Voltage	Colour temperature	Efficacy
W16Q-LA1-4/50K/P	Bronze	22W	1830lm	120V	5000K	83lm/W

* **QUICK SHIP:** Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

Series	Lamp type	Lumen package delivered	Voltage	Colour temperature	Casting colour	Options
W16Q	L - LED	A1 - 1830 Lumens (22W)	4 - 120V (standard) 14 - 208-277V 8 - 347V	50K - 5 000K	Blank - Bronze (standard) WH - White	P - 120V photocell (standard 120V and 347V) P277 - 208-277V photocell NPT 1 - 1/2" fitter A - Slipfitter TR - Trunion or Yoke mount