

## Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part category	Mounting and fixing accessories
Accessory / separate part type	Fixing column
Offer type	With mirror
Product compatibility	XUSL.E...136 to XUSL.E...181
Accessory / separate part destination	Safety light curtain type 2 Safety light curtain type 4

## Complementary

Ambient air temperature for operation	-22...131 °F (-30...55 °C) -22...131 °F (-30...55 °C)
Ambient air temperature for storage	-22...158 °F (-30...70 °C) -22...158 °F (-30...70 °C)
Column height	77.56 in (1970 mm)
Height protected	71.26 in (1810 mm)
Net weight	19.84 lb(US) (9 kg)

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	23.15 lb(US) (10.5 kg)
Package 1 Height	5.51 in (14 cm)
Package 1 width	7.87 in (20 cm)
Package 1 Length	81.10 in (206 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

---

Dimensions

---

With XUSZFB2

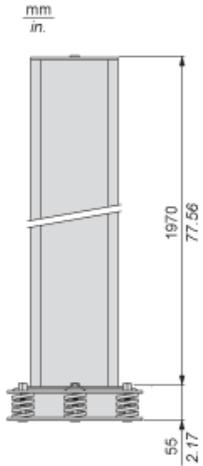

With XUSZFB1

