
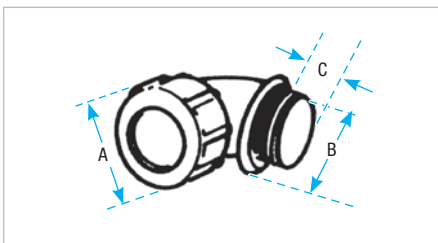


Raccords pour cordons flexibles et câbles d'alimentation

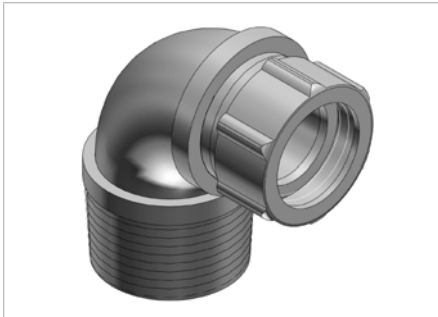

Rayon de manoeuvre

Raccord coudé à 90° fabriqué de fonte malléable. Garniture de Nnéoprène, manchon à filet coniques.

Raccord antitraction



N° de cat.	Gamme de calibres de câbles min.-max.	Grosseur de manchon (po)	Dimensions (po)			Diamètre de gorge (po)
			A	B	C	
2267	(0,125-0,250)	1/2	1-5/32	1-23/32	5/8	19/32
2268	(0,250-0,375)		1-5/32	1-23/32	5/8	19/32
2269	(0,375-0,500)		1-5/32	1-23/32	5/8	19/32
2270	(0,450-0,560)		1-5/32	1-23/32	5/8	19/32
2250*	(0,500-0,625)		1-3/8	1-11/16	9/16	39/64
2251*	(0,625-0,750)		1-3/8	1-11/16	9/16	39/64
2252	(0,125-0,250)	3/4	1-3/8	1-3/4	41/64	25/32
2271	(0,250-0,375)		1-3/8	1-5/8	41/64	25/32
2272	(0,375-0,500)		1-3/8	1-5/8	41/64	25/32
2273	(0,500-0,625)		1-3/8	1-5/8	41/64	25/32
2274*	(0,620-0,750)		1-3/8	1-5/8	41/64	25/32
2253*	(0,750-0,880)		1-11/16	1-31/32	9/16	25/32
2254	(0,375-0,500)	1	1-3/8	2	13/16	1
2255	(0,500-0,625)		1-3/8	2	13/16	1
2256*	(0,625-0,750)		1-3/8	2	13/16	1
2275	(0,750-0,875)		1-11/16	2	13/16	1
2276	(0,875-0,985)		1-11/16	2	13/16	1
2257*	(0,880-1,065)		2-3/32	2-21/32	25/32	15/16
2258*	(1,065-1,205)		2-3/32	2-21/32	25/32	15/16
2277	(0,880-1,065)	1-1/4	2-3/32	2-7/8	27/32	1-5/16
2278	(1,065-1,205)		2-3/32	2-7/8	27/32	1-5/16
2279*	(1,187-1,375)		2-11/32	2-13/16	13/16	1-11/32
2280*	(1,375-1,485)		2-11/32	2-13/16	13/16	1-11/32
2281	(0,812-1,000)	1-1/2	2-11/32	2-7/8	13/16	1-15/32
2282	(1,000-1,187)		2-11/32	2-7/8	13/16	1-15/32
2283*	(1,187-1,375)		2-11/32	2-7/8	13/16	1-15/32
2284	(1,125-1,375)	2	2-13/16	3-1/4	27/32	1-31/32
2285	(1,375-1,625)		2-13/16	3-1/4	27/32	1-31/32
2286	(1,625-1,875)		2-13/16	3-1/4	27/32	1-31/32

* Enlever suffisamment de la gaine extérieure du câble pour que les conducteurs traversent le corps du raccord

Conforme aux normes JIC et spécifications fédérales W-F-406B, W-F-408B

Conforme à la norme CG293 de la Garde côtière

Pour les renseignements sur les répartiteurs d'effort, voir en page B74