

Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part category	Mounting and fixing accessories
Accessory / separate part type	Fixing accessory
Product compatibility	XUSZWPE...
Accessory / separate part destination	Protective cover

Complementary

Ambient air temperature for operation	-22...131 °F (-30...55 °C) -22...131 °F (-30...55 °C)
Ambient air temperature for storage	-22...158 °F (-30...70 °C) -22...158 °F (-30...70 °C)
Kit composition	4 x stainless steel fixation clamp(s) 4 x stainless steel end clamp(s)
Net weight	0.33 lb(US) (0.15 kg)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	6.70 oz (190 g)
Package 1 Height	2.76 in (7 cm)
Package 1 width	3.94 in (10 cm)
Package 1 Length	6.69 in (17 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration

REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Mounting and Clearance

Various Stages in the Protective Screen Assembly

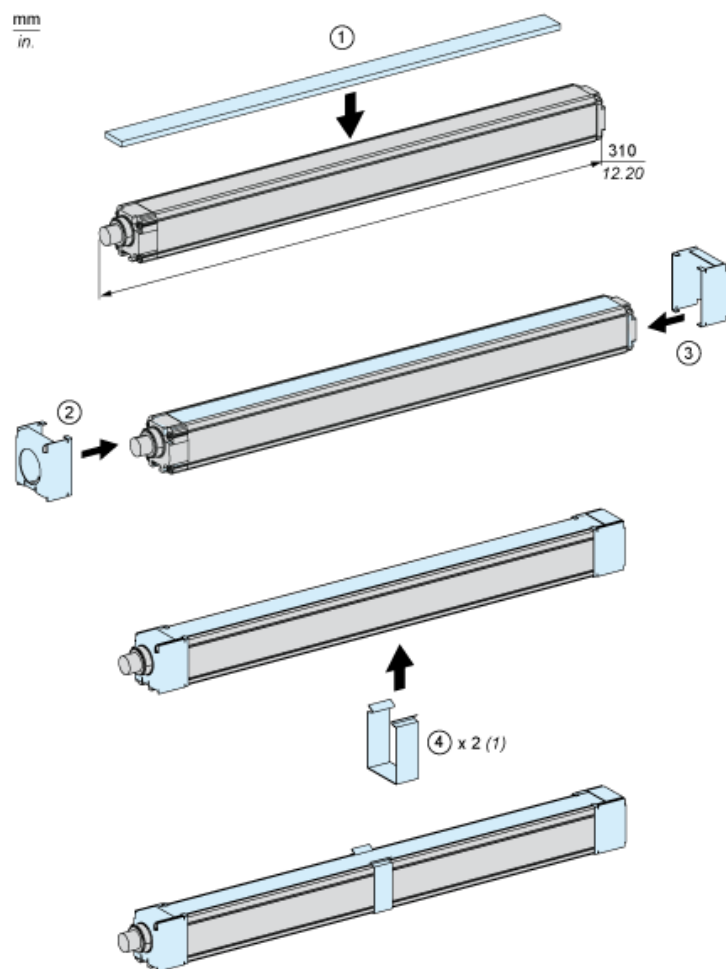

(1) Depending on the length