


Power Driver Bits

Power Drivers

- Manufactured in the U.S.A. to ensure proper fit in every application, each power driver is precision machined, heat treated and finished to the gold standards Klein Tools puts into every screwdriver blade. Proprietary processes create the longest life power driver bit in the industry.
- Precision machined for better fit, more torque and less wear
- Custom heat treated for long life



Klein Lasts Longer Before Cam Out

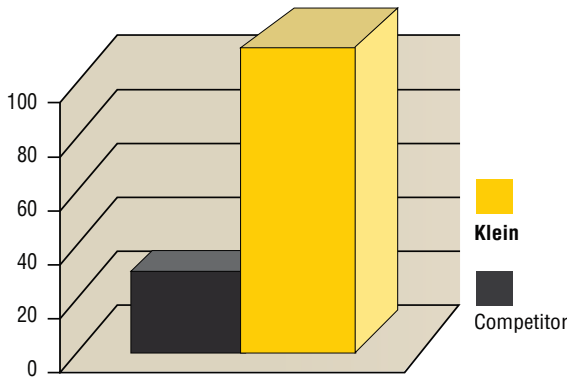

Cat. No.	Overall Length	Bit Type	Package Quantity	Weight
PH115	1" (25.4 mm)	#1 Phillips	5	0.10 oz (2.8 g)
PH1355	3-1/2" (88.9 mm)	#1 Phillips	5	0.50 oz (14.2 g)
PH162	6" (152.4 mm)	#1 Phillips	2	0.9 oz (26 g)
PH2115	1" (25.4 mm)	#2 Phillips	15	0.10 oz (2.8 g)
PH2355	3-1/2" (88.9 mm)	#2 Phillips	5	0.50 oz (14.2 g)
PH262	6" (152.4 mm)	#2 Phillips	2	0.9 oz (26 g)
PH315	1" (25.4 mm)	#3 Phillips	5	0.10 oz (2.8 g)
PH3355	3-1/2" (88.9 mm)	#3 Phillips	5	0.50 oz (14.2 g)
PH362	6" (152.4 mm)	#3 Phillips	2	0.9 oz (26 g)
SL31615	1" (25.4 mm)	3/16" (4.8 mm) Slotted	5	0.10 oz (2.8 g)
SL316355	3-1/2" (88.9 mm)	3/16" (4.8 mm) Slotted	5	0.50 oz (14.2 g)
SL1415	1" (25.4 mm)	1/4" (6.4 mm) Slotted	5	0.10 oz (2.8 g)
SL14355	3-1/2" (88.9 mm)	1/4" (6.4 mm) Slotted	5	0.50 oz (14.2 g)

Power Driver Sets				
Cat. No.	Overall Length	Bit Type	Package Quantity	Weight
32234	3-1/2" (88.9 mm)	#1 and #2 Phillips, #1 and #2 Square, 3/16" Slotted	5	0.10 lb (0.05 kg)
32235	6" (152.4 mm)	#1 and #3 Phillips	2	0.10 lb (0.05 kg)

Power Nut Drivers

- Available in several sizes, these hollow shaft magnetic nut drivers are designed for long bolts, studs or threaded rod jobs.
- Rare Earth magnetic head holds nuts and bolts to aid in hard-to-reach installations.
- The 5" and 10" models feature a wrench assist end, designed for high torque loosening found in many jobs.
- Power Nut Driver Set contains 1/4", 5/16" and 3/8" nut drivers (Cat. No. 32759)



Hollow magnetic shafts for nut running



PND7165



32759



PND71610

Cat. No.	Overall Length	Shaft Length	Hollow Depth	Nut Driver Sizes	Weight
32759	6-5/16" (160.3 mm)	2" (50.8 mm)	1-7/8" (47.6 mm)	1/4", 5/16", 3/8"	0.10 lb (0.05 kg)
PND7165	6-5/16" (160.3 mm)	5" (127.0 mm)	3-11/16" (93.7 mm)	7/16"	0.16 lb (0.07 kg)
PND125	6-19/64" (159.9 mm)	5" (127.0 mm)	3-23/32" (94.5 mm)	1/2"	0.19 lb (0.09 kg)
PND9165	6+21/64" (160.7 mm)	5" (127.0 mm)	3-5/8" (92.1 mm)	9/16"	0.23 lb (0.10 kg)
PND71610	11-5/16" (287.3 mm)	10" (254.0 mm)	8-13/16" (223.8 mm)	7/16"	0.25 lb (0.11 kg)
PND1210	11-19/64" (286.9 mm)	10" (254.0 mm)	8-23/32" (221.5 mm)	1/2"	0.31 lb (0.14 kg)
PND91610	11-5/16" (287.3 mm)	10" (254.0 mm)	8-5/8" (219.1 mm)	9/16"	0.35 lb (0.16 kg)

NOTE: Read and follow safety instructions in power tool owner's manual.

