

FM120-LED

DESIGNER SERIES FLUSH MOUNT



NAME:

TYPE:

DATE:

NOTES:

SPECIFICATIONS

WIRING:	Installs easily in traditional junction boxes (3" or 4").
HOUSING DETAILS:	This flush mount unit uses metal housing. The Azure 12" is available with or without the motion sensor. The motion sensor is a microwave sensor with a range up to 15 feet (4.5m), and a time delay of 5 minutes. Sensing no movement within that time period, the light will shut off automatically.
OPTICS:	LED technology delivers 1500 lumens (12" version) and 2000 lumens (16" version).
ELECTRICAL:	Integrated LEDs are direct-AC with no external driver. For usage in interior ceiling or wall installations in residential or commercial applications. Ambient operating temperature: -40°C (-40°F) to +50°C (+122°F). Certifications: ETL and Energy Star listed to U.S. and Canadian safety standards, as well as DAMP LOCATIONS rated.
LENS:	White decorative acrylic frosted lens provides an even light distribution.

COLOR TEMPERATURE:	3K - 4K
OPERATING TEMPERATURE:	-20°C + 50°C
CRI:	80+
LUMEN OUTPUT:	1500LM
DIMMABLE:	Yes
WATTS:	20 W
LED LIFE:	50,000 hours
WARRANTY:	5 years
VOLTAGE:	120V
DIAMETER:	11.75" (298.5mm)
HEIGHT:	3.375" (85.7mm)
INTEGRATED MOTION SENSOR:	No


APPLICATIONS

The Azure series of LED flush mount fixtures by NDR offers an affordable and stylish design that will complement a varied assortment of lighting applications. The acrylic diffuser may be easily removed for installation and cleaning. Ideal for interior ceiling or wall installations in residential or commercial applications.

FM120-LED

DESIGNER SERIES FLUSH MOUNT

DIMENSIONS

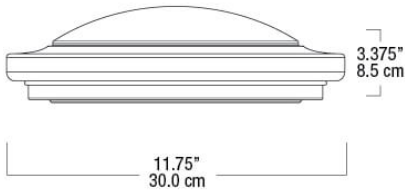

RATINGS



ORDERING GUIDE

AZURE FM120 SERIES

Series	Color Temperature	Finish
FM120-20W	3K 3000K/80CRI/20W 4K 4000K/80CRI/20W	WH White
Notes: Configure product using BOLD options: Ex: FM120-20W-3K-WH		