

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



## ORDERING INFORMATION

Order code: 65885  
 Description: TAPE/16.4'/2.9W/30K/24V/IP22/120/8MM/STD  
 UPC: 69549658851  
 Case quantity: 25

## FEATURES AND SPECIFICATIONS

Reel Total Length: 16.4 ft. (5 m)  
 Jacketed or Unjacketed: Unjacketed  
 Wire gauge: 22 AWG  
 Number of LEDs: 120 LEDs per meter  
 37 LEDs per foot  
 Cuttable length: 2 in. (50 mm) or every 6 LED chips  
 Maximum run length: 33 ft. (10 m)  
 Operating Temperature: -25°C / -13°F to 40°C / 104°F

## PERFORMANCE DATA

Volts (V): 24  
 Colour temperature (K): 3 000 (Neutral white)  
 Watts per length: 48 W per reel  
 9.6 W per meter  
 0.24 W per inch  
 Light output per length: 3 175 lm per reel  
 635 lm per meter  
 16 lm per inch  
 Efficacy (lm/W): 66  
 CRI: 90+  
 Life (hrs): 50 000  
 Beam angle (°): 120

\*Initial lumens range: +/- 5 %

\*\*Typical colour temperature range: +/- 5 %




For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.  
 November 27, 2017

## ORDERING INFORMATION

Order code: 65885  
 Description: TAPE/16.4'/2.9W/30K/24V/IP22/120/8MM/STD  
 UPC: 69549658851  
 Case quantity: 25

## TECHNICAL DRAWINGS

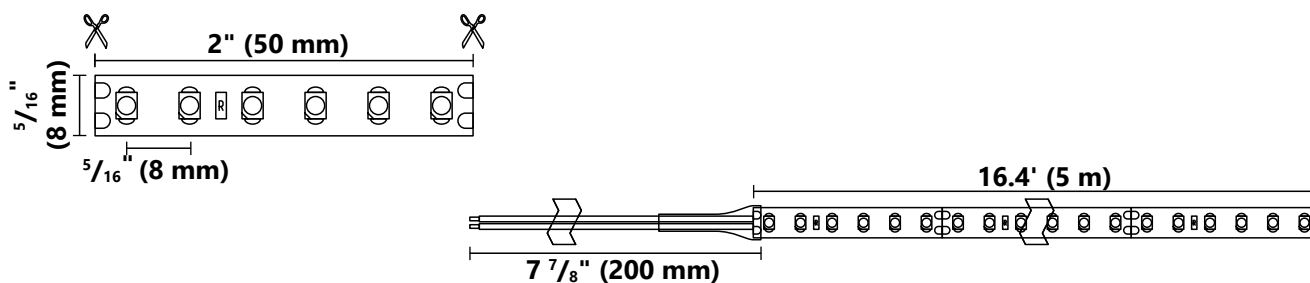

Extrusions, drivers and accessories are available (sold separately).

Custom lengths available upon request. Ask your sales representative for more information.

This LED Tape is also available in 1.5 W and 4.4 W and in IP67.

## CAUTIONS

- Turn off power before inspection, installation or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in dry locations.
- Do not open – no user serviceable inside.
- This device is not intended for use with emergency exit fixtures.
- Use only Class 2 rated components not exceeding 30VDC or 15 VAC when installing the outline lighting in wet locations or 60 VDC or 42.4 peak ac when installing the outline lighting in a dry or damp location.
- Do not go over 5 amps to match class 2 requirements.
- 24 VDC input only.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the product configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_