

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides task or accent illumination in residential and light commercial applications. Ideal for use under cabinets offering shadow-free lighting in kitchens and work areas, in bookcases, display cabinets or above cabinets setting a warm, inviting atmosphere in the kitchen. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.**

### CONSTRUCTION

Rugged post painted housing with snap on/off hinged service tray for quick installation and wiring. Shatter-resistant, acrylic white diffuser provides soft widespread illumination with zip-lock design for easy lamp access, cleaning and superior retention. Available in four lengths, can be ordered with or without on/off rocker switch.

### OPTICS

Utilizes linear T12 lamps for superior color rendering and long life (not included).

### ELECTRICAL

Standard with magnetic ballast, trigger start on 18" and 24" lengths, rapid start on 36" and 48" lengths (120 volt, 60Hz). Use with non-dimmable switches only.

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL listed to US and Canadian safety standards and suitable for damp locations.

### WARRANTY

1-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.





Catalog Number
Notes
Type


Indoor General Purpose

# Cabinet Light Direct Wire - T12

Linear T12 Fluorescent



DIMENSIONS						
Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Length inches (cm)	(B) Extension inches (cm)*
18"		18" 2UC 15	(1) 15W linear T12	5-1/4" (13.3)	18-1/4" (46.3)	1-3/4" (4.5)
24"		24" 2UC 20	(1) 20W linear T12	5-1/4" (13.3)	24-1/2" (62.2)	1-3/4" (4.5)
36"		36" 2UC 30	(1) 30W linear T12	5-1/4" (13.3)	36-1/4" (92.0)	1-3/4" (4.5)
48"		48" 2UC 40	(1) 40W linear T12	5-1/4" (13.3)	48-1/4" (123.2)	1-3/4" (4.5)
*Extension from ceiling. All dimensions are inches (centimeters) unless otherwise indicated.						

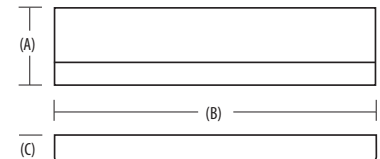

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example:** 2UC 15 120 SWR

Series <sup>1,2,3</sup>	Voltage	Cord & Plug	Rocker Switch	Options
<b>2UC 15</b> 18" - (1) 15W linear T12 fluorescent lamp required <sup>4</sup>	<b>120</b> 120V ballast (standard) Other voltage and ballast types (Consult factory)	(blank) No cord and plug <b>CSW</b> Cord and plug included	(blank) No switch <b>SWR</b> Rocker switch <sup>6</sup> (Available 18" and 24" trigger start ballast and 36" and 48" rapid start ballast only).	<b>NOM</b> NOM Certified (Consult factory for other options)
<b>2UC 20</b> 24" - (1) 20W linear T12 fluorescent lamp required <sup>4</sup>				
<b>2UC 30</b> 36" - (1) 30W linear T12 fluorescent lamp required <sup>5</sup>				
<b>2UC 40</b> 48" - (1) 40W linear T12 fluorescent lamp required <sup>5</sup>				

Replacement Parts: Order as separate catalog number.	
D2UC18	18" white acrylic diffuser
D2UC24	24" white acrylic diffuser
D2UC36	36" white acrylic diffuser
D2UC48	48" white acrylic diffuser

### Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Maximum quantity of cabinet fixtures that can be connected from a single power source can not exceed 540 watts from the lamp wattage.
- Magnetic Trigger Start ballast only.
- Magnetic Rapid Start ballast only.

## 12GU Cabinet Light Direct Wire - T12 Fluorescent

---

### PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.