


8501XUDO1200V53
NEMA Control Relay, Type X, utility, 10A resistive
at 600 VAC, 12 normally open contacts, 24 VDC
coil

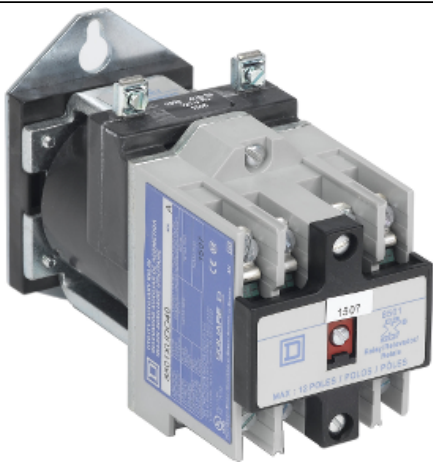

Principal

Range	8501X
Relay Type	Utility
Product	Relais
Current Rating	10 A AC 5 A DC
Contact Configuration	12 NO 12 standard contact cartridges
Number of Poles	12P
Coil Voltage	24 V DC
Voltage Rating	250 V DC
Mounting Type	Panneau
Operating Temperature	-40...71 °C
Electrical Connection	Borniers à vis-étrier
Certifications	CE CSA Listé UL
Operating Time	37 ms - déclenchement 21 ms - perte de niveau

Emballage

Poids de l'emballage (Kg)	1,225 kg
---------------------------	----------

Offre de la durabilité

Statut environnemental de l'offre	Produit Green Premium
Régulation REACH	Déclaration REACH
Directive RoHS UE	Conformité pro-active (Produit en dehors du scope légal RoHS UE) Déclaration RoHS UE

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Sans mercure	Oui
Information sur les exemptions RoHS	Oui
Régulation RoHS Chine	Déclaration RoHS pour la Chine
Profil environnemental	Profil environnemental du Produit
Profil de circularité	Informations de fin de vie

Garantie contractuelle

Garantie	18 months
----------	-----------