

Onyx RL-ONYX-60-SS

Recessed Light

Product Finishes: ■ ■



Specifications:

Voltage: 12V AC

Wattage: 4

Volt Amps: 5.5

Lumens: 200

Color Temp: 2700k

IP Rating: 67

CRI: 92.5

Light Source: Integrated

Material: Polycarbonate

Ring Material: Stainless steel

Cable Length: 36"

Lux (lx): 5.1

Candelas (cd): 191

Rated Life: 50,000 hours

Warranty: 7-year comprehensive

Dimmable: No

Color-Changing: No



Drive-Over Rated: Yes

Product Uses:

Pavers, Concrete, Walls,
Fences, Retaining Walls

Accessories:

Fang

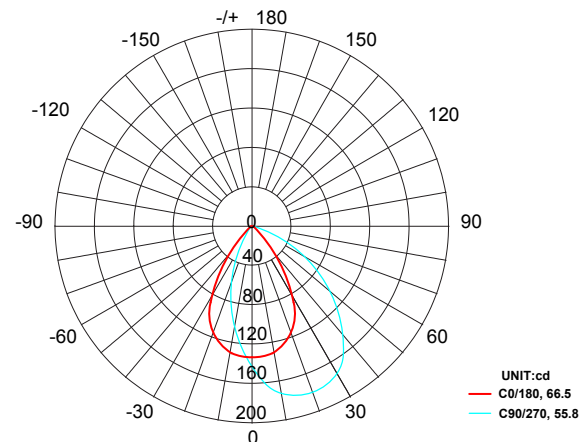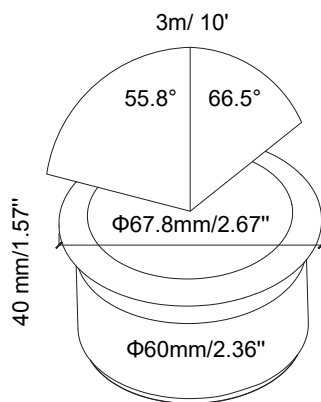

AVERAGE BEAM ANGLE (50%): 61.1 DEG

Max. Luminous intensity : 191 cd

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
3.25	7.70/14.65		3.48
6.25	1.92/3.66		6.96
10	0.88/1.67		10.70
13	0.48/0.91		13.91
16.5	0.31/0.59		17.62
20	0.22/0.42		21.40



support@boldpros.com | 1-833-472-9960

boldpros.com