

# Product data sheet

## Characteristics

# XZCC20MDM30B

male, 1/2 20UNF, 3-pin, straight connector - cable gland Pg 7



### Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector 1/2 20 UNF, 3 pins
Collar material	Metal
Status LED	Without
Cable connection	Screw terminal 0.00 in <sup>2</sup> (0.75 mm <sup>2</sup> ) 0.12...0.24 in (3...6 mm)

### Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	250 V AC
[In] rated current	4 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 μOhm
Net weight	0.06 lb(US) (0.025 kg)

### Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...185 °F (-40...85 °C)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	0.78 oz (22 g)
Package 1 Height	0.87 in (2.2 cm)
Package 1 width	1.54 in (3.9 cm)
Package 1 Length	3.82 in (9.7 cm)
Unit Type of Package 2	S01

Number of Units in Package 2	50
Package 2 Weight	2.99 lb(US) (1.355 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)


### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Not applicable, out of EU RoHS legal scope

### Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

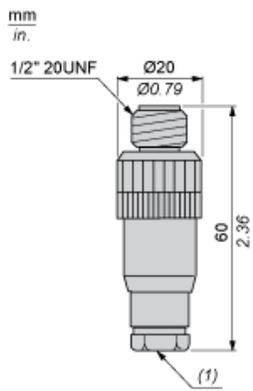

(1) Cable gland : no. 7 plastic (Pg 7)

---

Connections and Schemes

---

