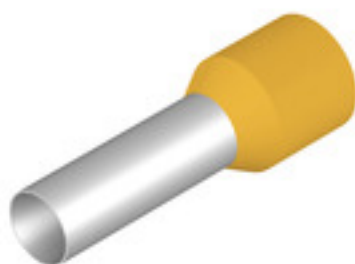


**H25,0/36D GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

- supplied loose in poly-bag
- Weidmüller colour code
- DIN colour code
- other colour code

**General ordering data**

|            |                                                  |
|------------|--------------------------------------------------|
| Version    | Wire-end ferrule, Standard, 24 mm, 22 mm, yellow |
| Order No.  | <a href="#">9019300000</a>                       |
| Type       | H25,0/36D GE                                     |
| GTIN (EAN) | 4008190054984                                    |
| Qty.       | 50 pièce(s)                                      |
| Packaging  | loose                                            |

## H25,0/36D GE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Caractéristiques techniques

## Dimensions and weights

|            |        |
|------------|--------|
| Net weight | 1,44 g |
|------------|--------|

## Technical data

|                        |                                              |         |          |
|------------------------|----------------------------------------------|---------|----------|
| Description of article | Wire end ferrule with plastic collar, yellow | Version | Standard |
|------------------------|----------------------------------------------|---------|----------|

## Wire-end ferrules

|                                         |                    |                               |             |
|-----------------------------------------|--------------------|-------------------------------|-------------|
| Collar diameter (D2)                    | 11,2 mm            | Colour code                   | DIN         |
| Conductor cross-section                 | 25 mm <sup>2</sup> | Contact surface diameter (D1) | 7,3 mm      |
| Contact surface length (L2)             | 22 mm              | L1 in mm                      | 36 mm       |
| Metal sleeve thickness (S1)             | 0,2 mm             | Military designation          | T 20A 030 A |
| Plastic collar thickness (S2)           | 0,4 mm             | Stripping length              | 24 mm       |
| Wire connection cross section AWG, max. | AWG 3              |                               |             |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0    | EC000005    |
| ETIM 8.0    | EC000005    | ETIM 9.0    | EC000005    |
| ECLASS 9.0  | 27-40-02-01 | ECLASS 9.1  | 27-40-02-01 |
| ECLASS 10.0 | 27-40-02-01 | ECLASS 11.0 | 27-40-02-01 |
| ECLASS 12.0 | 27-40-02-01 | ECLASS 13.0 | 27-40-02-01 |
| ECLASS 14.0 | 27-40-02-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate no. (cULus) | E499744    |

## Downloads

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                                                          |
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>                                                 |
| Brochures          |                                                                                          |

## H25,0/36D GE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Dessins

### Drawing

