


UFVLC42

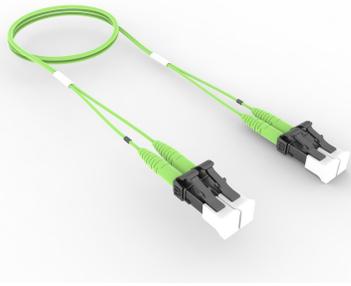

Ultra Low Loss OM5, LC to LC, Fiber Patch Cord, 1.6 mm Duplex, Low Smoke Zero Halogen

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber patch cord, duplex
Product Brand	SYSTIMAX ULL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Lime green
Color, boot B	Lime green
Color, connector A	Black
Color, connector B	Black
Interface, Connector A	LC/UPC
Interface, Connector B	LC/UPC
Jacket Color	Lime green
Polarity	Pairs, flipped
Total Fibers, quantity	2

Dimensions

Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	999
Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	999
Diameter Over Jacket	1.6 mm 0.063 in

UFVLCLC42

Ordering Tree

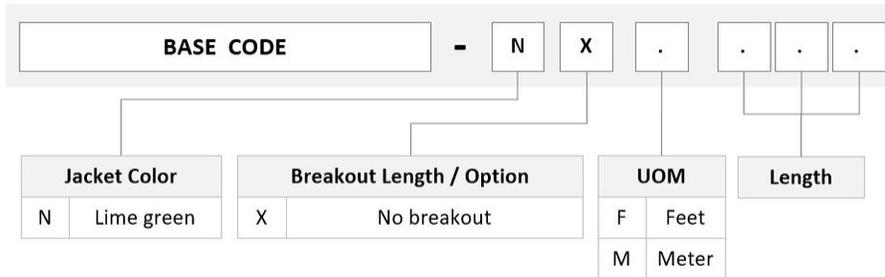

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant/Exempted



Included Products

760235067 – LazrSPEED® 1.6mm Low Smoke Zero Halogen Riser Zipcord Cable
N-002-ZC-5G-F16LM/E

UFVLC42

860655463

- LC/PC Connector, Multimode, Lime