

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



## ORDERING INFORMATION

**Order code:** 64962  
**Description:** LED/CL11MS/12.5W/30K/FM/RND/ND/STD  
**UPC:** 69549649620  
**Case quantity:** 1  
**Luminaire description:** Round Motion Sensor LED Ceiling Luminaire

## FEATURES AND SPECIFICATIONS

**Lens type:** Frosted Polycarbonate Diffuser  
**Lens benefits:** Easy to install diffuser with twist and lock  
**Housing:** Simple, functional and low profile design.  
**Applications:** Ideal for use in stairwells, hallways, closets, utility areas, common areas in offices, accomodation building and various commercial applications.  
**Benefits compared to Traditional Light:** Motion sensor is the best way to do energy savings. LED uses less energy than fluorescent lights, lasts longer and is maintenance free.



For a complete list of ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

## FIXTURE PERFORMANCE

**Wattage (W):** 12.5  
**Colour temperature (K):** 3 000  
**CRI:** 80  
**Average life in hours:** 50 000  
**Lumens:** 1 100  
**Efficacy with lens (LPW):** 90  
**Voltage (V):** 120  
**Hertz (Hz):** 60  
**mili Amps (mA):** 300  
**Beam angle:** 120°  
**Dimmable:** No  
**Mounting:** Surface Mount/Flush-mount, Ceiling or wall.

## POWER FACTOR (PF)

0.90

## TOTAL HARMONIC DISTORTION (THD)

< 20 %


## AMBIENT OPERATING TEMPERATURES

-20°C/4°F to 45°C/113°F


## ORDERING INFORMATION

Order code: 64962  
 Description: LED/CL11MS/12.5W/30K/FM/RND/ND/STD  
 UPC: 69549649620  
 Case quantity: 1  
 Luminaire description: Round Motion Sensor LED Ceiling Luminaire

## PHOTOMETRICS - BEAM SPREAD\*

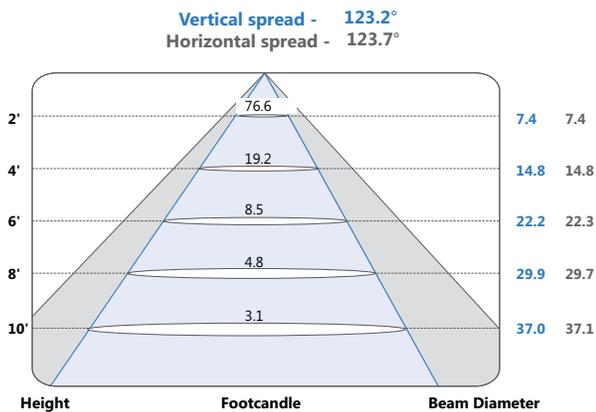

## PHOTOMETRICS - CANDELA DISTRIBUTION\*

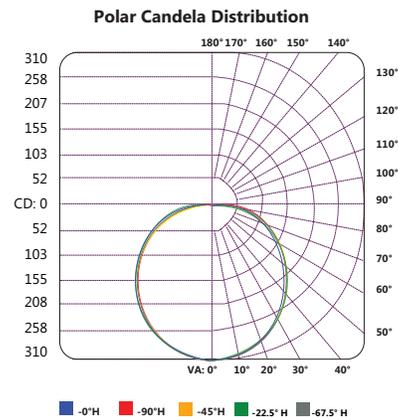

## PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)\*

RCC %:	80				70				50			30			10			0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	.90	1.05	1.05	1.05	.99	.99	.99	.93	.93	.93	.90
1	1.04	.98	.93	.88	1.00	.94	.90	.70	.88	.84	.81	.83	.79	.76	.77	.75	.72	.69
2	.93	.84	.76	.70	.90	.81	.74	.57	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3	.85	.73	.64	.57	.81	.71	.62	.48	.66	.59	.53	.62	.56	.51	.58	.53	.49	.46
4	.77	.64	.55	.48	.74	.62	.53	.41	.58	.51	.45	.55	.48	.43	.51	.46	.41	.39
5	.71	.57	.48	.41	.68	.55	.46	.35	.52	.44	.38	.49	.42	.37	.46	.40	.36	.33
6	.65	.51	.42	.35	.63	.50	.41	.31	.47	.39	.33	.44	.37	.32	.42	.36	.31	.29
7	.60	.46	.37	.31	.58	.45	.36	.27	.42	.35	.29	.40	.33	.28	.38	.32	.28	.25
8	.56	.42	.33	.27	.54	.41	.33	.24	.39	.31	.26	.37	.30	.25	.35	.29	.25	.23
9	.52	.39	.30	.24	.50	.38	.30	.22	.36	.28	.23	.34	.27	.23	.32	.26	.22	.20
10	.49	.36	.27	.22	.47	.35	.27	.20	.33	.26	.21	.31	.25	.21	.30	.24	.20	.18

CAN ICES-005 (B) / NMB-005 (B)

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 10, 2016


## ORDERING INFORMATION

Order code: 64962  
 Description: LED/CL11MS/12.5W/30K/FM/RND/ND/STD  
 UPC: 69549649620  
 Case quantity: 1  
 Luminaire description: Round Motion Sensor LED Ceiling Luminaire

## DIMENSIONS

Length: -  
 Diameter: 11" (27.94 cm)  
 Height: 3.5" (8.89 cm)  
 Depth: 4.01" (10.2 cm)

## TECHNICAL DRAWINGS

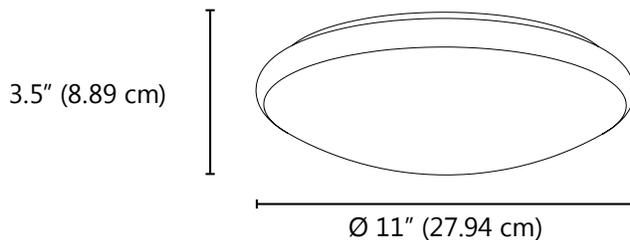

## WARNINGS

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with Canadian Electrical Code in Canada or National Electrical Code (NEC) in the US.
- Make sure input voltage and frequency are compatible with the fixture. Check installation guide for power requirements prior to installation.

**WARNING – Risk of electric shock. Suitable for damp locations.**

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_