

Ultra Low Loss Singlemode MPO12 Unpinned to LC Uniboot 24-Fiber  
Low Smoke Zero Halogen Riser Array Cord

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Red
Color, boot B	Blue
Color, connector A	Green
Color, connector B	Blue
Construction Type	Stranded
Fibers per Subunit, quantity	24
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	24

## Dimensions

# URGMPLUHF

Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

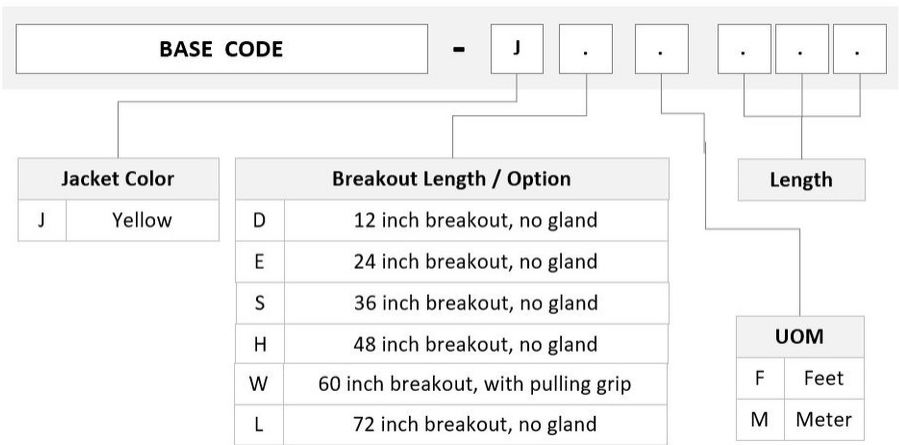

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor   Low Smoke Zero Halogen (LSZH)

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted

# URGMPLUHF

---



## Included Products

- |                     |   |   |
|---------------------|---|---|
| 760238097           | – | Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 24 |
| N-024-MP-8G-F36YL/D |   | fiber   |
| 860638318           | – | MP012, ULTRA LOW LOSS, FEMALE, SM, GREEN, 3mm                   |
| 860650412           | – | TeraSPEED® LC UniBoot 2.0MM UPC/LC UNIBOOT CONNECTOR KIT        |