



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 6" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

**IC21R**

## PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing  
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs  
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require a gasket.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected – see page 2.

**Socket** Medium base porcelain with nickel-plated copper screw shell  
 • Floating socket with spring attaches to trim for installation.

**Trims** Trim selection shown on page 2.

**Labels** UL listed for through branch-wiring, damp locations and IP  
 • Product thermally protected against improper use of lamps  
 • Union made • UL Listed/CSA certified • Trim No. 241 is wet location approved for covered ceiling applications.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

## INSTALLATION

**Junction Box** Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.



**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel springs to accommodate up to 1¼" ceiling thickness.

## PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC21R 6" Incandescent Shallow Remodel IC Housing	120V	A19/R20/PAR20/BR30/PAR30/PAR30L (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

## DIMENSIONS

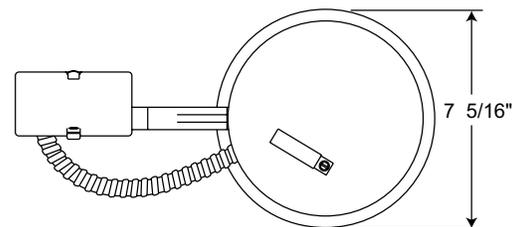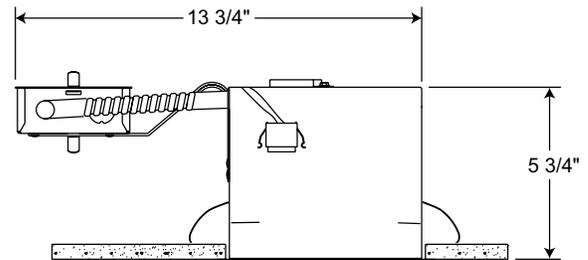

6 3/4" CEILING CUTOUT

## Accessories

Catalog Number	Description
ALG6R	Air-Loc Gasket

To order, specify catalog number.

# 6" SHALLOW UNIVERSAL IC REMODEL HOUSING

## INCANDESCENT LAMPS

### IC21R

#### TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating	
 **	 244S BWH 244S WWH	Shallow Black Baffle, White Trim Ring Shallow White Baffle, White Trim Ring	50W PAR30	
 **	 247S CWH 247S GWH 247S BWH 247S HZWH 247S WHZWH	Shallow Clear Alzak® Cone, White Trim Ring Shallow Gold Alzak® Cone, White Trim Ring Shallow Black Alzak® Cone, White Trim Ring Shallow Haze Cone, White Trim Ring Shallow Wheat Haze Cone, White Trim Ring	75W PAR30, 65W BR30	
	 250 WH 250 SC 250 ABZ	Open Frame, White Open Frame, Satin Chrome Open Frame, Classic Aged Bronze	65W BR30	Trim Size: 7 $\frac{5}{8}$ " O.D. (except Cat. Nos. 228, 229, and 241 series - 8" O.D.). Alzak is a registered trademark of Alcoa Corp. Note: In Canada when insulation is present, Type IC fixtures must be used.
	 228 WH	Regressed Eyeball, White	50W PAR20/R20	
	 229 WH 229 SC 229 ABZ 229 BL	Regressed Eyeball, White Regressed Eyeball, Satin Chrome Regressed Eyeball, Classic Aged Bronze Regressed Eyeball, Black	75W PAR30L, 65W BR30	 JUNO IC housings meet IECC Energy Code requirements per ASTM E283. Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.
	 248 WWH	Regressed Eyeball, White Baffle, White Trim Ring	50W PAR20/R20	
	 249 BWH 249 WWH	Regressed Eyeball, Black Baffle, White Trim Ring Regressed Eyeball, White Baffle, White Trim Ring	75W PAR30L, 65W BR30	◆ UL Listed for use in wet location.
	 241 WH ◆ 241 PW ◆	Drop Opal w/Reflector, White Drop Opal w/Reflector, Plastic White	40W A19	** NOTE: TR6 Trim Ring compatible with 244S, 247S trims. Housing and trim can be ordered together or separate, but will always ship separately.