

XPEA110

Single foot switch, Harmony XPE, plastic, black, without cover, 1 step, 1 contact 1NC +NO, IP43



Main

Range of Product	Harmony XPE
Product or Component Type	Foot switch
Material	Plastic
Foot switch type	Single foot switch
Device short name	XPEA
Trigger mechanism	Without trigger mechanism
Contact operation	1 step
Contacts type and composition	1 NC + 1 NO
Color	Black

Complementary

Positive opening	With IEC 60947-5-1 appendix K
Connections - terminals	Screw clamp terminal, $\leq 1 \times 2.5 \text{ mm}^2$ with or without cable end Screw clamp terminal, $\leq 2 \times 1.5 \text{ mm}^2$ with or without cable end
Cable entry	1 plain hole for M20 cable gland 1 plain hole for M16 cable gland
Mechanical durability	2000000 cycles
[Ie] rated operational current	3 A, 240 V, AC-15, A300 0.27 A, 250 V, DC-13, Q300 IEC 60947-5-1 appendix A
[Ui] rated insulation voltage	500 V 3)IEC 60947-1 500 V 3)NF C 20-040 group C 500 V 3)VDE 0110 group C 300 VUL 508 300 VCSA C22.2 No 14
[Uimp] rated impulse withstand voltage	6 kV IEC 60947-1
Maximum resistance across terminals	25 MOhm IEC 60255-7 category 3 25 MOhm NF C 93-050 method A
Short-circuit protection	10 A cartridge fuse gG IEC 60947-5-1 10 A cartridge fuse gG VDE 0660-200
Rated operational power in W	10 W DC-13 60 cyc/mn, 5000000 cycles, 24 V 0.5 IEC 60947-5-1 appendix C 4 W DC-13 60 cyc/mn, 5000000 cycles, 120 V 0.5 IEC 60947-5-1 appendix C 7 W DC-13 60 cyc/mn, 5000000 cycles, 48 V 0.5 IEC 60947-5-1 appendix C
Net Weight	0.61 lb(US) (0.275 kg)

Environment

Standards	IEC 60947-5-1
Protective treatment	TH
Ambient Air Temperature for Operation	-13...131 °F (-25...55 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Vibration resistance	5 gn 10...500 Hz)IEC 60068-2-6
Shock resistance	25 gn IEC 60068-2-27
Overvoltage category	Class II IEC 61140 Class II NF C 20-030
IP degree of protection	IP43 conforming to IEC 60529

Ordering and shipping details

Category	22472-PUSHBUTTON, FOOT SWITCHES
Discount Schedule	I
GTIN	3389110650006
Returnability	No
Country of origin	BR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.92 in (12.5 cm)
Package 1 Width	3.70 in (9.4 cm)
Package 1 Length	7.44 in (18.9 cm)
Package 1 Weight	11.78 oz (334.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	4
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	3.73 lb(US) (1.69 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	64
Package 3 Height	30.31 in (77.0 cm)
Package 3 Width	31.50 in (80.0 cm)
Package 3 Length	23.62 in (60.0 cm)
Package 3 Weight	78.35 lb(US) (35.54 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Contractual warranty

Warranty	18 months
----------	-----------

Foot Switch without Trigger Mechanism

Dimensions

$\frac{\text{mm}}{\text{in.}}$

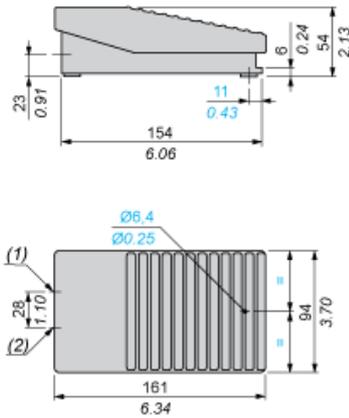


- (1) 1 plain hole for ISO M20 or n° 13 (Pg 13.5) cable gland.
- (2) 1 plain hole for ISO M20 or n° 9 (Pg 11) cable gland.

Electrical Durability of Contacts

AC-15 Utilization Category

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

Inductive circuit:

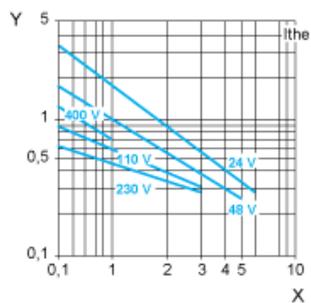

X Current in A

Y Millions of operating cycles

DC-13 Utilization Category

Refer to the product characteristic "Operational power in W".