

Technical Information Bulletin

Fluorescent

ORDERING INFORMATION

Order code: 69325
Description: F24T5/35K/8/HO/PS/G5/STD S2
UPC: 069549026353
Case quantity: 25

PERFORMANCE DATA

Shape: T5
Base: G5 (Min Bipin)
Starting method: Program Start (PS)
Wattage (W): 24
Colour temperature (K): 3 500
CRI: 85
Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 30 000
 Based on a 12 hour start 40 000
Initial lumens (lm): 2 000
Mean lumens (lm): 1 900
Nominal efficiency (lm/W): 83
TCLP compliant: Yes
Phosphor composition: Triphosphor
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10




Nominal length : 22 in (559 mm)
Dia. : 5/8 in. (16 mm)


¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast.

DIMENSIONS

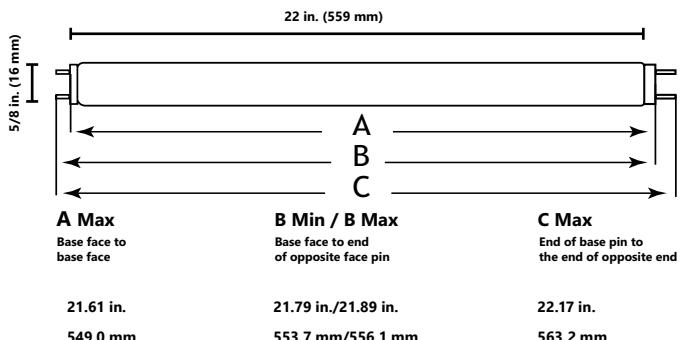

SPECTRAL DISTRIBUTION

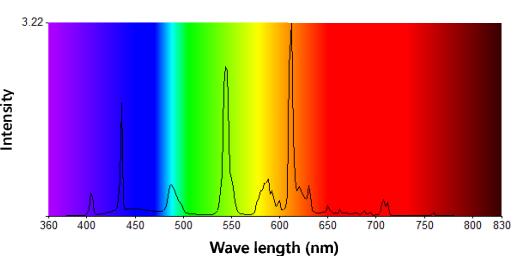

Means this bulb meets federal minimum efficiency standards.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.