

Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|-------------------------------------|--|
| Jumper cable end 1 | M12 male 3 pins straight connector with screw-on |
| Jumper cable end 2 | M12 female 3 pins straight screw-on |
| Cable composition | 3 x 0.34 mm ² |
| Cable length | 6.56 ft (2 m) |
| Wire insulation material | PUR |
| Cable outer diameter | 0.20 in (5.2 mm) |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| [In] rated current | 4 A |
| Insulation resistance | >= 1000 MOhm |
| Maximum resistance across terminals | 5000 mOhm |
| Net weight | 0.21 lb(US) (0.095 kg) |

Environment

| | |
|---------------------------------------|---|
| IP degree of protection | IP67 IP69K IP65 |
| Product certifications | CULus |
| Ambient air temperature for operation | -31...194 °F (-35...90 °C) static 23...194 °F (-5...90 °C) flexing |
| Ambient air temperature for storage | -31...212 °F (-35...100 °C) |

Packing Units

| | |
|------------------|------------------------|
| Package 1 Weight | 0.17 lb(US) (0.078 kg) |
| Package 1 Height | 0.300 dm |
| Package 1 width | 2.400 dm |
| Package 1 Length | 2.400 dm |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

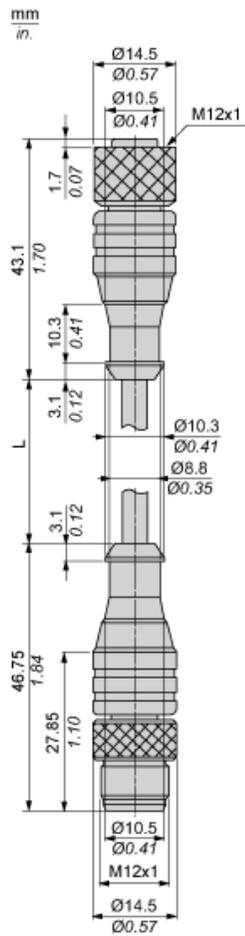

L : Length of cable

Connections and Schemes

