


6 INCH

E26 Screw Base Non-IC Housing

H7T

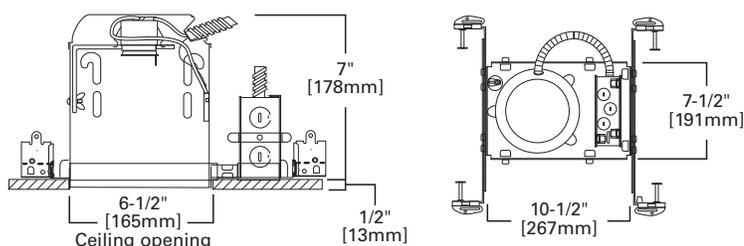

H7T

6" Non-IC, New Construction, 120V

The H7 recessed housing is the standard in the industry for both light commercial and residential applications. H7 series features full-frame design, robust construction, feed-through listing, Got Nail! bar hangers; and may support use of higher wattage lamps. A wide variety of trims allows a number of different lighting effects to be created with one basic housing. The H7T is for use in non-insulated ceilings. If ceiling insulation is present, it must be kept 3" from all sides of housing. May be retrofit with compatible Halo LED lighting systems.



Special Features

- Got Nail!™ bar hangers
- q-Channel bars with Pass-N-Thru™
- Slide-N-Side™ junction box
- Quick Connect™ push wire nuts

Compatible Trims

| | | | | | | |
|-----------------|------------------|-----|------------------|------|-------------------|---------------------|
| 30 ^o | 172 ^o | 378 | 428 | 1479 | 6108 | 6146 |
| 70 | 173 | 401 | 429 | 4051 | 6109 | 6150 |
| 71 | 300 | 405 | 430 ^o | 4261 | 6110 | 6160 |
| 73 | 301 | 410 | 478 | 6100 | 6120 ^o | 6170 |
| 74 | 303 | 419 | 1412 | 6101 | 6121 ^o | 6215 |
| 76 | 310 | 420 | 1416 | 6102 | 6125 ^o | 6222 |
| 78 ^o | 312 | 424 | 1417 | 6103 | 6126 ^o | 6230 |
| 79 | 328 | 425 | 1450 | 6106 | 6130 | 6255 |
| 170 | 353 | 426 | 1475 | 6107 | 6145 | 30SBAT ^o |
| 171 | 376 | | | | | |



Trims for use in Halo listed housings



Select trims are classified for use in other housings, see www.eaton.com/lighting/legal

◊ Air-Tite trims can make the H7T installation ASTM E283 compliant (in a non-insulated ceiling)

Features

Housing

- Single wall die-stamped CRS housing
- White housing paint finish

Socket Plate

- Rigid socket plate adjusts and locks without tools for various lamp sizes
- Socket plate and bracket may be removed when using socket supporting trims

Plaster Frame

- The housing can be removed from plaster frame to provide access to the junction box
- Galvanized steel construction
- Housing adjusts in plaster frame to accommodate ceilings up to 1" – 3/8" thick
- Plaster frame features include:
 - Patented regressed locking screw positioned for securing hanger bars from below the ceiling
 - Cutouts for easily crimping hanger bars in position
 - Halo name embossed on plaster frame

Includes:

- Got Nail!™ bar hangers (Details Pg. 9)
- q-Channel bars with Pass-N-Thru™ (Details Pg. 9)
- Slide-N-Side™ junction box wire traps (Details Pg. 9)
- Quick Connect™ push wire nuts (Details Pg. 9)

Socket

- Porcelain socket with nickel plated brass screw shell
- Snap-in springs secure socket to socket plate, and may be detached when using socket supporting trims
- Overspray protector included

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation

Trims

Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LED

Compliance

- cULus Listed 1598 luminaire
- cULus Listed damp location
- cULus Listed for wet location, covered ceiling, with select trims
- cULus Listed for feed through
- RoHS compliant
- IP rated (Improper Lamp)