

The LED Surface Mount Wrap is a 4' linkable linear fixture ideal for indoor use. The wraparound fixture features an easy to use link connector ideal for combining multiple fixtures in one row.



### APPLICATIONS

**Ideal for indoor use in stairwells, hallways, foyers, utility areas, corridors, & many more.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Housing is made of steel with polycarbonate end caps and a white powder coat paint finish. Flexible link connector allows you to easily combine up to eight linear fixtures in a row. Fixture is suitable for damp locations

#### LED

The fixture contains a high efficiency LED strip that delivers a total output of 4358 lumens at an efficacy of approx. 91 lumens/watt. The operating temperature of the fixture is -25 C to + 55° C. Fixture is ideal for indoor use.

#### Electrical

Total system wattage of the unit is 48W. The standard unit has a high efficiency driver that operates at 120 V - 277 V.

#### Mounting

Easy mounting direct on the wall or ceiling. Knockouts are provided for mounting to standard 4" junction boxes.

#### Easy Wiring and Maintenance

Fixture comes complete with link connector in the box. Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

#### Lens

Standard fixture comes with frosted lens.


#### Finish

Standard finish is white.


<b>Watts</b>	<b>48</b>
<b>Lumens</b>	<b>minimum 4000 measured 4358</b>
<b>Efficacy</b>	<b>91 lumens/watt</b>

<b>Operating Temperature</b>	<b>-25°C to +55°C</b>
<b>Certification</b>	<b>ETL Listed, Energy Star</b>
<b>LED Life</b>	<b>50,000 hours</b>
<b>Colour Temperature</b>	<b>4000K</b>
<b>Warranty</b>	<b>5 years</b>
<b>Weight</b>	<b>4.9 lbs</b>
<b>CRI</b>	<b>&gt;80</b>
<b>Power Factor</b>	<b>0.99</b>
<b>Total Harmonic Distortion</b>	<b>&lt;20%</b>

### DIMENSIONS

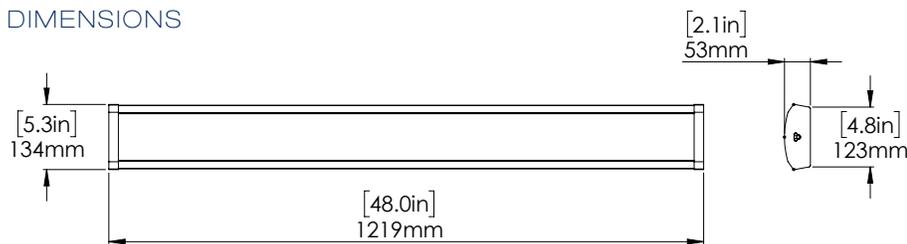

### KNOCKOUTS ON BACK OF THE FIXTURE

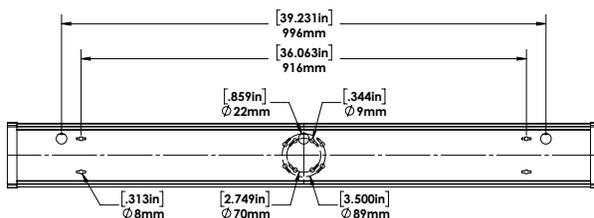

Weight  
4.9 lbs



EASY WIRING TAB



**Easy Installation**

Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

LINK CONNECTOR



**Link Connector**

The easy to use link connector fits into the end of the SMW4-LED fixture and enables you to combine up to eight fixtures in a row

(Fixture comes complete with link connector in the box.)

ACCESSORIES (SOLD SEPARATELY)



**CORD & PLUG**

5' cord and plug sold separately.



**INTERCONNECT**

12" white interconnect cable sold separately.

ORDERING GUIDE

<b>SMW4</b>	-	<b>LED48</b>	-	<b>B</b>	-	<b>4K</b>	-	<b>WHT</b>	-	<b>FR</b>
				<b>VOLTAGE</b>		<b>COLOUR TEMP</b>		<b>FINISH</b>		<b>LENS</b>
				<b>B - 120-277V*</b>		<b>4K- 4000K*</b>		<b>WHT - WHITE*</b>		<b>FR - FROSTED LENS*</b>

ACCESSORIES ORDERING GUIDE



**CORD & PLUG - SWM4-LED 5" CORD AND PLUG WHT**

**INTERCONNECT CABLE - SMW4-LED 12" INTERCONNECT CABLE WHT**

**Non dimmable:** Fixture should be used with non dimmable switches

\* Standard configuration