



## Main

|                           |                                  |
|---------------------------|----------------------------------|
| Range of Product          | Harmony 9001K<br>Harmony 9001SK  |
| Product or Component Type | Empty enclosure                  |
| Device short name         | 9001SK                           |
| Number of cut-out         | 3 cut-outs                       |
| Cable entry               | 1 entry tapped for 3/4" knockout |

## Complementary

|                     |  |
|---------------------|--|
| Product destination | For Ø 30 mm control and signalling units |
| Material            | Plastic                                  |
| Net Weight          | 1.74 lb(US) (0.79 kg)                    |

## Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TH   |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)                       |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C)                       |
| Overvoltage category                  | II IEC 61140                                     |
| NEMA degree of protection             | NEMA 1<br>NEMA 12<br>NEMA 3<br>NEMA 4<br>NEMA 4X |

## Ordering and shipping details

|                   |                   |
|-------------------|-------------------|
| Category          | 21429-9001 SK,SKY |
| Discount Schedule | CS1               |
| GTIN              | 785901154099      |
| Returnability     | Yes               |
| Country of origin | MX                |

## Packing Units

|                              |                      |
|------------------------------|----------------------|
| Unit Type of Package 1       | PCE                  |
| Number of Units in Package 1 | 1                    |
| Package 1 Height             | 5.00 in (12.7 cm)    |
| Package 1 Width              | 5.30 in (13.462 cm)  |
| Package 1 Length             | 11.50 in (29.21 cm)  |
| Package 1 Weight             | 32.48 oz (920.793 g) |

## Offer Sustainability


|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>   |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        | No need of specific recycling operations   |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Below drawing shows a 2-hole enclosure. Refer to the product characteristics to get the number of holes.

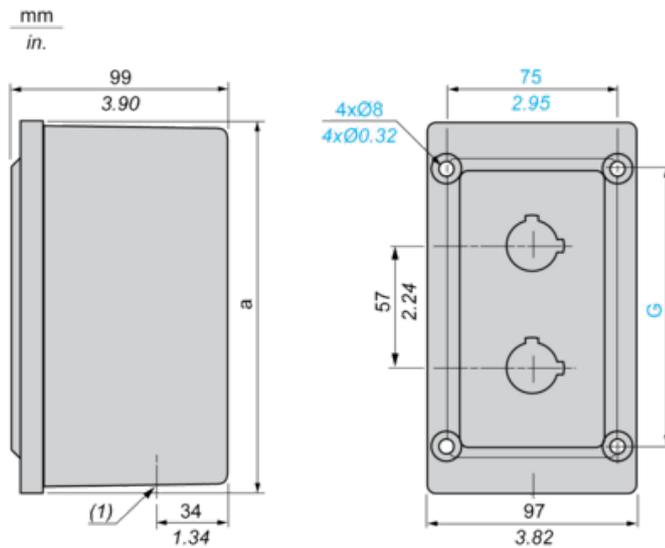

(1) Knockout conduit thread: 3/4".

| a   |      | G   |      |
|-----|------|-----|------|
| mm  | in.  | mm  | in.  |
| 226 | 8.90 | 181 | 7.12 |