


NSYPLM54G

Wall mounted polyester enclosure, Thalassa
PLM, plain door, 530x430x200mm, IP66, IK10,
RAL 7035

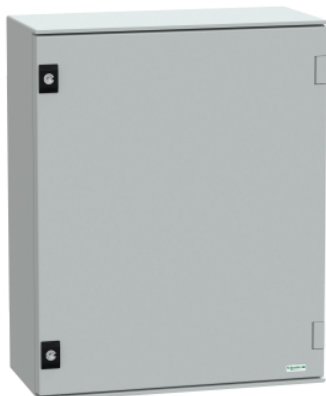

Main

Range	Thalassa
Product name	Thalassa PLM
Device short name	PLM
Enclosure type	Multi-purpose
Category	Compact enclosure
Nominal height	20.87 in (530 mm)
Nominal width	16.93 in (430 mm)
Nominal depth	7.87 in (200 mm)
Enclosure mounting	Wall mounted
Device composition	1 body 1 door 2 lock
Door type	Solid
Lock type	3 mm double-bar lock

Complementary

Number of locks	2
Mounting plate description	Without mounting plate
Accessibility for operation	Front
Removable parts	Door by hinges
Material	Polyester reinforced with fibreglass
Color	Gray RAL 7035)
Standards	IEC 62208 NEMA classification 13 NEMA classification 4X
Product Certifications	UL
Electrical Insulation Class	Class II

Environment

IP degree of protection	IP66 IEC 60529
IK degree of protection	IK10 IEC 62262
Fire resistance	1760 °F (960 °C) IEC 62208
Ambient Air Temperature for Operation	-40...176 °F (-40...80 °C)

Ordering and shipping details

Category	80034-ENCLOSURE SYSTEMS WALL MOUNT METAL
Discount Schedule	ES1
GTIN	3606480776571
Returnability	Yes
Country of origin	ES

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.45 in (24.000 cm)
Package 1 Width	17.80 in (45.200 cm)
Package 1 Length	22.99 in (58.400 cm)
Package 1 Weight	15.67 lb(US) (7.106 kg)
Unit Type of Package 2	P12
Number of Units in Package 2	30
Package 2 Height	51.18 in (130.000 cm)
Package 2 Width	31.50 in (80.000 cm)
Package 2 Length	47.24 in (120.000 cm)
Package 2 Weight	503.05 lb(US) (228.180 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations