




DIMENSIONS

Dimensions are approximate and subject to change.

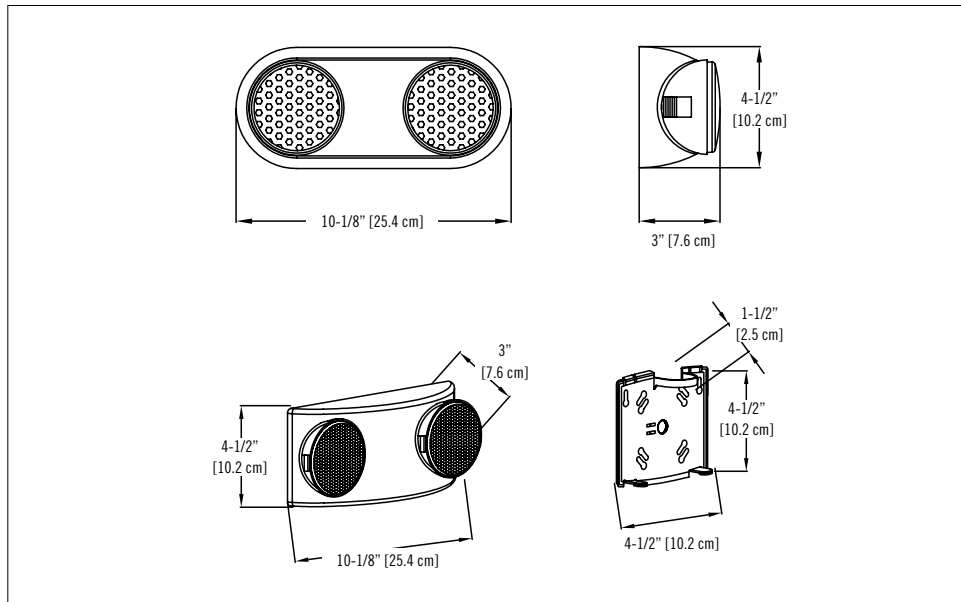

CMPB-RL SERIES

Miniature LED
battery unit

FEATURES

- Fully adjustable LED glare-free lens
 - 3.6V 2W long life LED light source
 - Universal voltage input capability 120V, 277V and 347V
 - Automatic, temperature compensated, pulse type charger
 - Low voltage disconnect prevents over discharge of battery
 - Automatic brownout protection
 - Sealed maintenance-free 3.6V nickel-cadmium battery offering 120 minutes of emergency lighting
 - Battery lock-out prevents discharge during installation
 - Red LED charger monitor
 - Momentary test switch allows for quick operational check
 - Injection-molded thermoplastic ABS housing
 - Rear keyhole slots and universal knock-outs to mount to any standard 4" junction box
 - Injection-molded thermoplastic ABS housing
 - Fast and easy installation with snap-together design
 - Ceiling or wall mount installation
 - Suitable for damp locations
 - Use in 5°C-30°C ambient temperature
 - Meets CSA C22.2 no.141-15
 - Comes standard with 1 year warranty
- See warranty details at: www.tnb.ca/en/brands/ready-lite

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE	CURRENT	EFFICIENCY
CM-PB	120V, 50/60 Hz	1.6W	0.012A	0.96P
	277V, 50/60 Hz	1.8W	0.007A	0.92P
	347V, 50/60 Hz	2.4W	0.007A	0.92P

CIRCUITRY

Emergency duration	2 Hours
Recharge time	24 Hours
Light Source	Ultra bright LED
Color temperature	6500K- 7500K
Ni-Cd Battery:	3.6V 2000mAh SC

ORDERING INFORMATION

SERIES	VOLTAGE
CM-PB-RL	Blank= 120/347VAC

EXAMPLE: CM-PB-RL