



### Main

Range of Product	Zelio Logic
Product or Component Type	GSM modem
Type of modem	Type quad band 900/1800 MHz, 850/1900 MHz
Data backed up	Flash memory

### Complementary

Kit composition	GSM modem Fixing on DIN rail (assembled with the GSM modem) 1 supply cable 1 antenna with cable 2 lugs for plate mounting
Function Available	Send alarm/receive instruction Send alarm to e-mail address Transfer program Update firmware monitoring
Number of messages	28
Electrical data recording	Telephone/E-mail Discrete and digital value Date and time
[Us] rated supply voltage	12...24 V DC
Supply voltage limits	5.5...32 V
Maximum supply current	165 mA 12 V 87 A 24 V 2100 mA 5.5 V
Power dissipation in W	2.1 W
Associated fuse rating	2.5 A
Electrical connection	1 cable Com-M Com-M specific to Zelio RS232 serial, specific Zelio communication protocol link with the modem, AT commands 1 antenna with cable 1 cable 1 cable Com-Z Com-Z specific to Zelio, specific Zelio communication protocol Zelio Logic smart relays SR.B..... and SR2 E..... Version (>= V3.1) Supply cable
Cable length	4.92 Ft (1.5 m) supply cable 8.20 ft (2.5 m) antenna with cable
Insulation	1780 V optocoupler Com-Z specific to Zelio By the cable SR2 CBL07 Com-M specific to Zelio
Connections - terminals	Screw terminals, 1 x 0.25...1 x 2.5 mm <sup>2</sup> AWG 24...AWG 14) flexible with cable end Screw terminals, 2 x 0.25...2 x 0.75 mm <sup>2</sup> AWG 24...AWG 18) flexible with cable end Screw terminals, 1 x 0.25...1 x 2.5 mm <sup>2</sup> AWG 24...AWG 14) semi-solid Screw terminals, 1 x 0.25...1 x 2.5 mm <sup>2</sup> AWG 24...AWG 14) solid Screw terminals, 2 x 0.25...2 x 1.5 mm <sup>2</sup> AWG 23...AWG 16) solid
Tightening torque	4.43 lbf.in (0.5 N.m)
Net Weight	0.74 lb(US) (0.335 kg)

## Environment

Product Certifications	UL[RETURN]PTCRB[RETURN]GOST[RETURN]CSA[RETURN]IC[RETURN]FCC part 15 standard[RETURN]C-tick
Standards	EN/IEC 60068-2-6 Fc EN/IEC 60068-2-32
Electromagnetic compatibility	Conducted and radiated emissions class B group 1 conforming to EN 55022-11
IP degree of protection	IP31 IEC 60529
Environmental characteristic	Low voltage directive EN/IEC 60950-1 R and TTE directive ETSI EN 301419-1 R and TTE directive ETSI EN 301 489-7 R and TTE directive ETSI EN 301 511 EMC directive ETSI EN 301 489-1
Pollution degree	2 EN/IEC 61131-2
Ambient air temperature for operation	-4...131 °F (-20...55 °C) IEC 60068-2-2 -4...131 °F (-20...55 °C) IEC 60068-2-2
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Operating altitude	6561.68 ft (2000 m)
Maximum altitude transport	10000.00 ft (3048 m)
Relative humidity	0...95 % 131 °F (55 °C) without condensation 0...95 % without condensation, during storage

## Ordering and shipping details

Category	22378-SR2,3 ZELIO 2 RELAYS
Discount Schedule	I
GTIN	3389119203999
Returnability	No
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.95 in (7.5 cm)
Package 1 Width	2.95 in (7.5 cm)
Package 1 Length	5.79 in (14.7 cm)
Package 1 Weight	11.22 oz (318.0 g)
Unit Type of Package 2	S03
Number of Units in Package 2	20
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	15.20 lb(US) (6.895 kg)

## Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------

## GSM Modem

### Rail Mounting

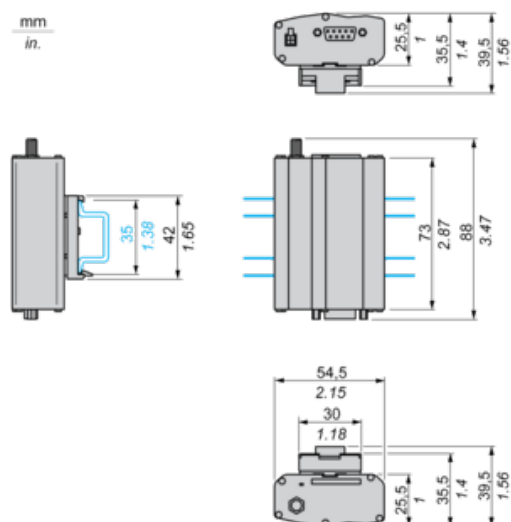

### Screw Fixing

