

Technical Information Bulletin


LED PL



Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 65604
Description: LED/PLL/19W/40K/2G11/ND/STD
UPC: 69549656048
Case quantity: 30

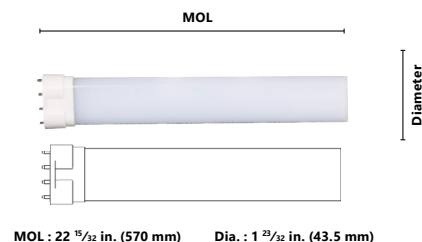

PERFORMANCE DATA

Shape: PL Long
Base: 2G11 - 4PIN
Watts (W): 19
Starting method: Program start
Lamp voltage (VAC): 120-277 / 347
Color temperature (K)**: 4 000
Life L70 (hrs): 50 000
Initial Lumens (lm)*: 2 000
Initial lumens per watt (lm/W): 105
CRI: 83
Beam angle (°): 120
Operating temperature range: -20°C / -4°F to 45°C / 113°F

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

ADDITIONAL INFORMATION

Turn power off before inspection, installation, or removal.

Risk of electrical shock – do not use where directly exposed to water or weather.

Do not open – no user serviceable parts inside.

This device is not intended for use with emergency exit fixtures or emergency exit lights.

Not for use with dimmers.

This lamp only operates on electronic ballasts. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

Direct replacement for 40 W CFL lamps only.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 11, 2019

Technical Information Bulletin

LED PL



ORDERING INFORMATION

Order code: 65604
 Description: LED/PLL/19W/40K/2G11/ND/STD
 UPC: 69549656048
 Case quantity: 30

LED PLL BALLAST COMPATIBILITY LIST

120-277 V

Ballast Description			1 Lamp		2 Lamps	
Brand	Order Code	Number of lamps	Input Voltage			
			120 V	277 V	120 V	277 V
Keystone	KTEB-242-UV-PS-DW	2				
	KTEB-242-UV-RS-DW	2				
Osram	QTP 2x26CF/UNV DM	2				
	QTP 2x26CF/UNV DM PEM	2				
	QTP 2x26/32/42CF/UNV DM PEM	2				
STANDARD	31526 - E22642-UV-A-TDE FLX	2				
	10469 - E23640-120-SL GLB	2				
	10445 - ED22150-120-277-SL GLB	2				
Universal	E2150-UV-S	2				
	ED2150-UV-BS	2				

347 V

Ballast Description			1 Lamp	2 Lamps
Brand	Order Code	Number of lamps	Input Voltage	
			347 V	
STANDARD	31527 - E22642-347-A-TDE FLX	2		
	10470 - E23640-347-SL GLB	2		
	10449 - ED22150-347-BLS GLB	2		
Universal	E2150-347S	2		
	ED2150-347S	2		

compatible
 non-compatible
 N/A

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 11, 2019