

ORDERING INFORMATION

Order code: 10629
 Description: F12T4/41K/430mm/G5/STD
 UPC: 69549106291
 Case quantity: 48




Nominal length : 17 in. (430 mm) Dia. : ½ in. (12 mm)

PERFORMANCE DATA


Shape:	T4
Base:	G5 (Min Bipin)
Starting method:	Rapid Start (RS)
Wattage (W):	12
Colour temperature (K):	4 100
CRI:	80
Rated life on IS ¹ ballast:	
Based on a 3 hour start	7 000
Based on a 12 hour start	8 000
Initial lumens (lm):	600
Mean lumens (lm):	564
Nominal efficiency (lm/W):	50
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

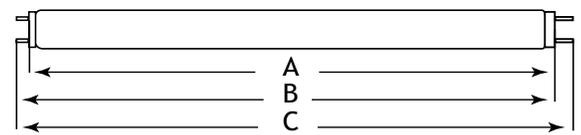

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
16.37 in.	16.59 in./16.65 in.	16.87 in./16.92 in.
416.00 mm	421.80 mm/423.00 mm	428.80 mm/430.00 mm

SPECTRAL DISTRIBUTION

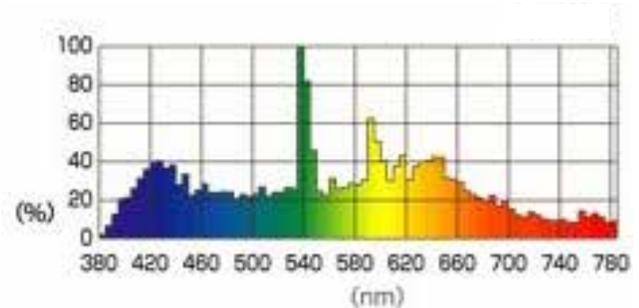

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 ballast.

