

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



Nominal length : 48 in. (1 219.2 mm) Dia. : 1 ½ in. (38 mm)

ORDERING INFORMATION

Order code: 64252
 Description: F40T12/50K/9/RS/G13/STD
 UPC: 69549642522
 Case quantity: 30


PERFORMANCE DATA

Shape: T12
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 40
 Colour temperature (K): 5 000 (Daylight)
 CRI: 90
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 24 000
 Initial lumens (lm): 2 250
 Mean lumens (lm): 2 250
 Nominal efficiency (lm/W): 56
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
 Minimum starting temperature (°C): 10




¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

DIMENSIONS

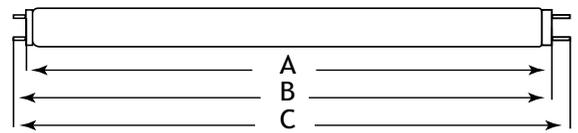

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
47.22 in. 1 199.4 mm	47.40 in./47.78 in. 1 204 mm/1 213.6 mm	47.67 in./47.78 in. 1 210.8 mm/1 213.6 mm

SPECTRAL DISTRIBUTION

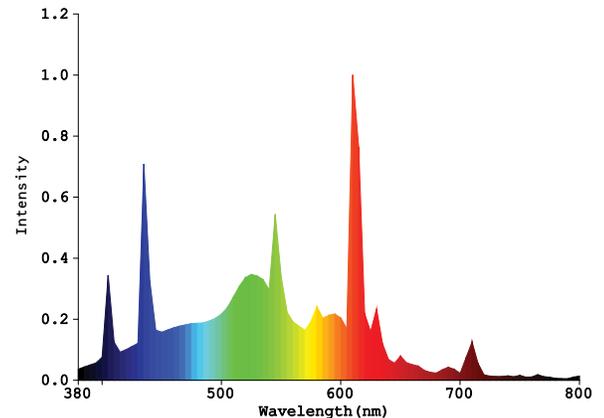

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.