

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L2SSQ

LED SLIM STRIP WITH SQUARE LENS

3 CCT Selectable

ORDERING INFORMATION

Order code: 69047
Model number: L2SSQ-96LS2-Q/3C
UPC: 069549023741
Case quantity: 1
DLC unique ID: S-3WCLUR¹ (DLC Premium) / S-YEOSKQ² (DLC Standard)

PHYSICAL DATA

Length in. (cm): 94 1/8 (239.20)
Lens material: Frosted PMMA
Housing material: 24 gauge white powder painted steel
Mounting: Surface, suspended or row mounted (Junction box cover and mounting brackets included)

PERFORMANCE DATA

Watts (W): 90
Volts (V AC): 120-347
Color temperature (K)¹: 3 500/4 000/5 000
Lumen output (lm)²: 11 970
Efficacy (lm/W): 133
CRI: 80+
Life L70 (h)³: 186 000
Tested LM-80 (h)³: 9 000
Dimming: 0-10 V
Power factor: 0.90
THD (%): 10
Frequency (Hz): 50/60
Surge protection (kV): 2.5
Input current (A): 0.26-0.75
Operating temp. range: -20°C to 50°C (-4°F to 122°F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 500 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

3 500 K		4 000 K		5 000 K	
Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
11 970	133	12 060	134	12 150	135

DEFAULT PROGRAMMING

4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class A for use in commercial applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

¹ Stairwell And Passageway Luminaires

² Direct Linear Ambient Luminaires

ACCESSORIES (order separately)

Order code	Type	Order code	Type
69328	V-Hooks (set of 2)	69080	Remote control for PIR motion sensor
68676	Suspension kit - 2 chains (1 m) ¹	69068	Continuous row mounting connector
69082	10' Aviation cable kit with canopy, power cord & dimming wires	68687	Wire guard kit 96"
69069	External mount PIR motion sensor (120-277 V only)	69067	Replacement lens 96"

¹ Must be used in conjunction with 69328.


COMPATIBLE DIMMERS¹

Brand	Model
Leviton	IllumaTech IP710-LFZ
	IllumaTech IP710-DLZ
	IllumaTech IP710-DOZ
	Decora DS710-10Z
Lutron	Nova T NTSTV-DV
	Nova NFTV
	Diva DDTV-WH
Legrand	RH4FBL3PW

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHT

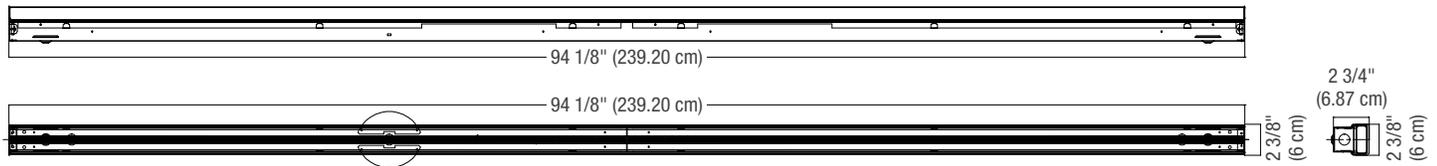


Net weight (lbs)	7.50
------------------	------

PHOTOMETRIC DATA¹

69047 • L2SSQ-96LS2-Q/3C • 4 000 K • 12 050.3 lm

Polar candela distribution

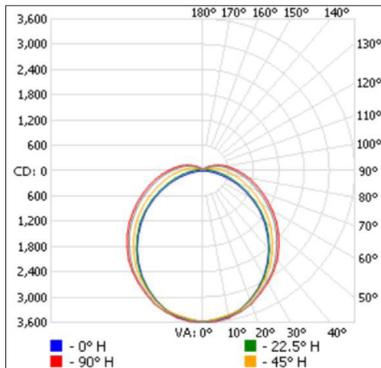

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	2 750.3	22.8
0-40	4 489.2	37.3
0-60	7 968.9	66.1
60-90	3 048.1	25.3
70-100	2 112.1	17.5
90-120	848.5	7
0-90	11 017.0	91.4
90-180	1 033.3	8.6
0-180	12 050.3	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	1 242
3.3'	330
5.0'	144
6.7'	80.0
8.3'	52.1
10.0'	35.9

Beam width	Beam width
4.4'	6.6'
8.5'	12.7'
12.9'	19.3'
17.3'	25.9'
21.4'	32.1'
25.8'	38.6'

■ Vert. spread: 104.4°
■ Horiz. spread: 125.2°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.