

### Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part category	Protection accessories
Accessory / separate part type	Protective screen
Product compatibility	XUSL.E...121
Accessory / separate part destination	Safety light curtain type 2 Safety light curtain type 4
Height	49.02 in (1245 mm)
Quantity per set	Set of 4

### Complementary

Material	Polycarbonate
Sensing distance reduction coefficient	0.97 Sn
Net weight	1.10 lb(US) (0.5 kg)

### Environment

Resistance to chemical agents	Resistant alkalis Resistant to inorganic diluted acids Resistant detergents and cleaners Resistant aqueous solutions
Ambient air temperature for operation	14...131 °F (-10...55 °C) 14...131 °F (-10...55 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C) -13...158 °F (-25...70 °C)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1


Package 1 Weight	3.97 lb(US) (1.8 kg)
Package 1 Height	5.71 in (14.5 cm)
Package 1 width	7.87 in (20 cm)
Package 1 Length	53.54 in (136 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

Mounting and Clearance

Various Stages in the Protective Screen Assembly

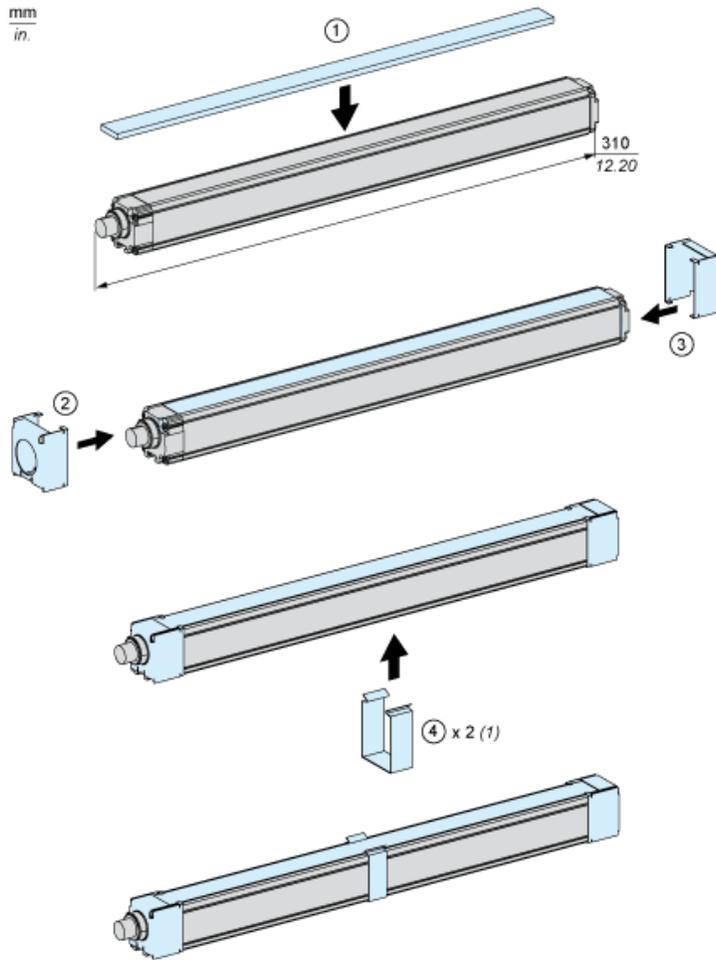

(1) Depending on the length