

Ultra Low Loss OM4 MPO8 Unpinned to LC Uniboot 8-Fiber Plenum Array Cord

Product Classification

Regional Availability	Europe Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Gray
Color, boot B	Aqua
Color, connector A	Aqua
Color, connector B	Beige
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Aqua
Interface, Connector A	MPO-08/UPC
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8


Dimensions

Breakout Length	12 in 24 in 36 in 48 in 60 in 72 in
Cable Assembly Length Range (m)	1 – 304

UQXQPLUJ8

Cable Assembly Length Range (ft) 2 – 999

Ordering Tree

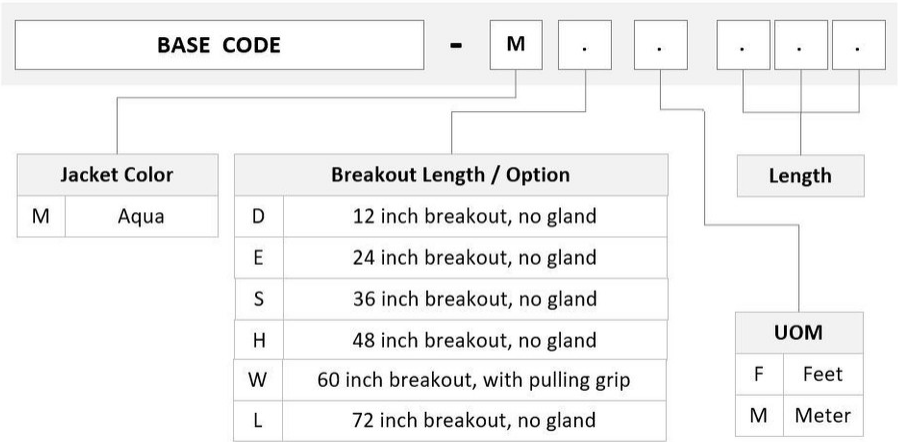

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted



UQXQPLUJ8

Included Products

- | | | |
|-------------------|---|--|
| 760074997 | – | LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12 fiber |
| P-012-MP-5K-F30AQ | | |
| 860633307 | – | MPO8, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm |
| 860650410 | – | LazrSPEED® LC UniBoot 2.0MM MM/LC UNIBOOT CONNECTOR KIT |