

Product data sheet

Characteristics

XZCRV1511041C5

jumper cable XZ - male straight M12 4-pin -
female straight M12 4-pin - PVC 5m



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|-------------------------------------|--|
| Jumper cable end 1 | M12 male 4 pins straight connector with screw-on |
| Jumper cable end 2 | M12 female 4 pins straight screw-on |
| Collar material | Metal |
| Cable composition | 4 x 0.25 mm ² |
| Cable length | 16.40 ft (5 m) |
| Wire insulation material | PVC |
| Cable outer diameter | 0.18 in (4.6 mm) |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| [In] rated current | 3 A |
| Insulation resistance | >= 1000 MOhm |
| Maximum resistance across terminals | 5000 mOhm |
| Net weight | 0.51 lb(US) (0.23 kg) |

Environment

| | |
|---------------------------------------|----------------------------|
| IP degree of protection | IP67 IP65 |
| Product certifications | CULus |
| Ambient air temperature for operation | -25...80 °C static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Packing Units

| | |
|------------------|------------------------|
| Package 1 Weight | 0.42 lb(US) (0.189 kg) |
| Package 1 Height | 0.150 dm |
| Package 1 width | 1.700 dm |
| Package 1 Length | 2.200 dm |


Offer Sustainability

| | |
|----------------------------|---|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

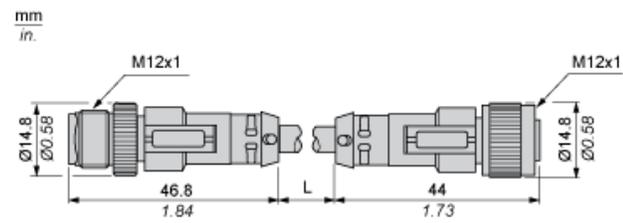

L : Length of cable

Connections and Schemes

