


# LA2KT2E

Electronic time delay auxiliary contact block,  
TeSys K, 1C/O, on delay 1-30s, front, control  
24...48V AC/DC

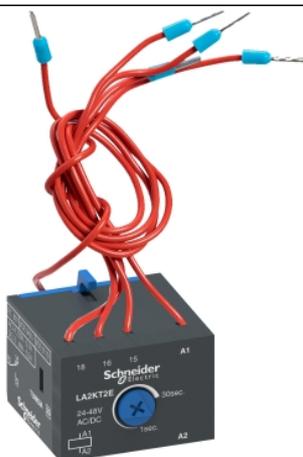

## Main

Range	TeSys
Product name	TeSys K
Product or Component Type	Time delay auxiliary contact block
Device short name	LA1
Range compatibility	TeSys K LC1K[RETURN]TeSys K CA2K[RETURN]TeSys K CA3K[RETURN]TeSys K CA4K
Mounting Location	Front
Pole contact composition	1 C/O
Contacts operation	Time delay
Timer type	On delay
Time delay range	1...30 s
[Ue] rated operational voltage	24...48 V AC/DC control circuit 240 V AC signalling circuit
Rated operational voltage limits	0.85...1.1 Uc
[Ith] conventional free air thermal current	2 A for signalling circuit
Standards	EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1
Product Certifications	UL[RETURN]CSA[RETURN]CE[RETURN]UKCA

## Complementary

Insulation resistance	> 10 MOhm
Connections - terminals	Slip-on terminals
Reset time	1.5 S during time delay 0.5 s after time delay
Height	1.06 in (27 mm)
Width	1.50 in (38 mm)
Depth	1.50 in (38 mm)
Net Weight	0.09 lb(US) (0.04 kg)

## Environment

Environmental characteristic	Normal environment
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TC IEC 60068
Ambient Air Temperature for Operation	14...140 °F (-10...60 °C)

## Ordering and shipping details

Category	22341-CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	3389110230048
Returnability	No
Country of origin	TN

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.97 in (5.000 cm)
Package 1 Width	1.89 in (4.800 cm)
Package 1 Length	1.89 in (4.800 cm)
Package 1 Weight	1.41 oz (40.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	70
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	6.86 lb(US) (3.110 kg)

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------