


TERMINAL BLOCKS (H TYPE)


(POLYAMIDE 66, 4.0-10.0 mm² / 10.0-16.0 mm²)

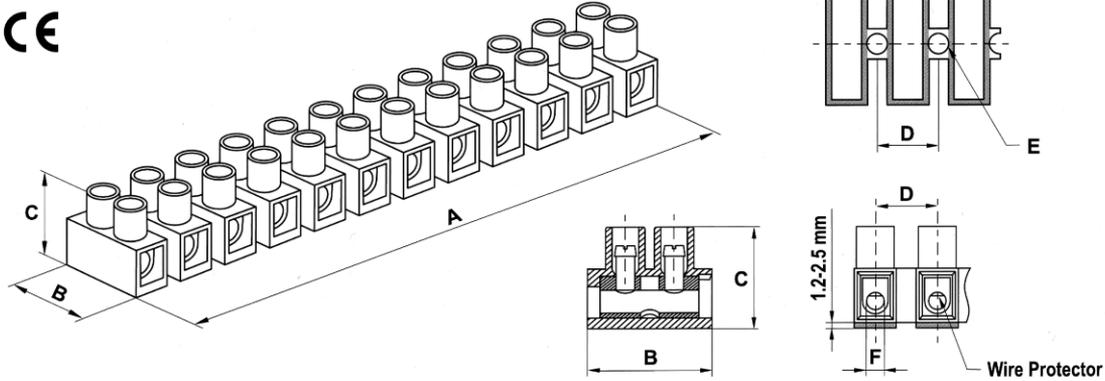

DIMENSIONS:												
Model	Clamping Area	Wire Range (Cu, AWG)	Screw	Dimensions (mm/inch)								Packing
				Unit	A	B	C	D	E	F		
TSPA12HDS-12	4.0 mm ²	22-10 Sol/Str	M3.5x7	(mm)	140.7	23.80	19.00	12.00	3.90	4.2±0.1	40 Pcs/Bag	
				(in)	5.40	0.94	0.75	0.47	0.15	0.15	400 Pcs/Ctn	
TSPA14HDS-12	6.0 mm ²	20-8 Sol/Str	M4.0x9	(mm)	158.0	25.60	25.20	13.50	4.40	5.0±0.1	25 Pcs/Bag	
				(in)	6.22	1.01	0.99	0.53	0.17	0.19	250 Pcs/Ctn	

Description:

- **Base:** With 1.2-2.5 mm raised base
- **Housing Material:** Polyamide 66 (Nylon 66), UL 94V-0
- **Temperature Rating:** 105°C (UL), -30°C to T110°C (VDE)
- **Terminal Insert:** Brass metal alloy, nickel plated
- **Wire Protector (DS):** Stainless spring steel
- **Screw:** Zinc plated
- **Stripping Length:** 7.0 mm/0.27 inch for PA12; 9.0 mm/0.35 inch for PA14
- **Poles Available:** 12 poles

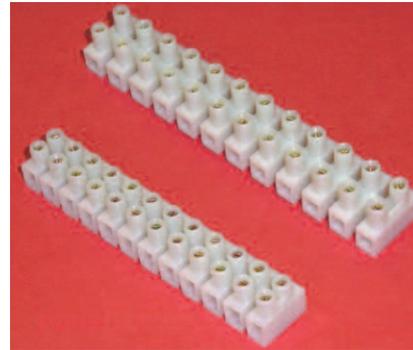

For Copper Stranded Wire Only

APPROVALS:		
Model	Canada/U.S.A.	Germany
TSPA12HDS-12	300V, 35A #22 - #10	500V, 41A 6 mm ²
TSPA14HDS-12	300V, 50A #22 - #10	500V, 57A 10 mm ²

