

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



Nominal length : 48 in. (1 219.2 mm) Dia. : 1 ½ in. (38 mm)


## ORDERING INFORMATION

Order code: 64253  
 Description: F40T12/65K/9/RS/G13/STD  
 UPC: 69549642539  
 Case quantity: 30

## PERFORMANCE DATA


Shape: T12  
 Base: G13 (Med Bipin)  
 Starting method: Rapid Start (RS)  
 Wattage (W): 40  
 Colour temperature (K): 6 500 (Daylight Deluxe)  
 CRI: 90  
 Rated life on PS/PRS<sup>1</sup> ballast:  
 Based on a 3 hour start 24 000  
 Initial lumens (lm): 2 250  
 Mean lumens (lm): 2 250  
 Nominal efficiency (lm/W): 56  
 TCLP compliant: Yes  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
 Minimum starting temperature (°C): 10

## DIMENSIONS

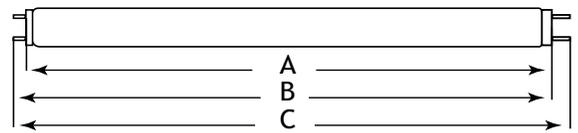

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
47.22 in. 1 199.4 mm	47.40 in./47.78 in. 1 204 mm/1 213.6 mm	47.67 in./47.78 in. 1 210.8 mm/1 213.6 mm

## SPECTRAL DISTRIBUTION

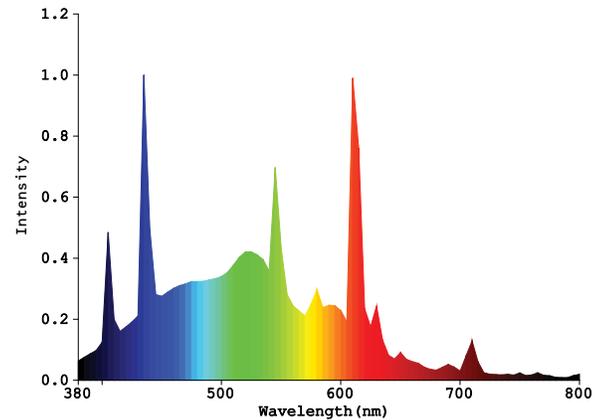

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.