



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|--------------------------------------|
| Electrical connection | Straight female connector M8, 3 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 32.81 ft (10 m) |
| Cable outer diameter | 0.20 in (5.2 mm) |
| Cable composition | 3 x 0.34 mm ² |
| Wire insulation material | PUR |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| [In] rated current | 4 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net weight | 0.50 lb(US) (0.225 kg) |

Environment

| | |
|---------------------------------------|---|
| IP degree of protection | IP67 IP69K IP65 |
| Product certifications | CULus |
| Ambient air temperature for operation | -40...176 °F (-40...80 °C) static 23...176 °F (-5...80 °C) flexing |

| | |
|-------------------------------------|----------------------------|
| Ambient air temperature for storage | -40...176 °F (-40...80 °C) |
|-------------------------------------|----------------------------|

Packing Units

| | |
|------------------|------------------------|
| Package 1 Weight | 0.54 lb(US) (0.246 kg) |
| Package 1 Height | 0.350 dm |
| Package 1 width | 2.200 dm |
| Package 1 Length | 2.700 dm |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Contractual warranty


| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

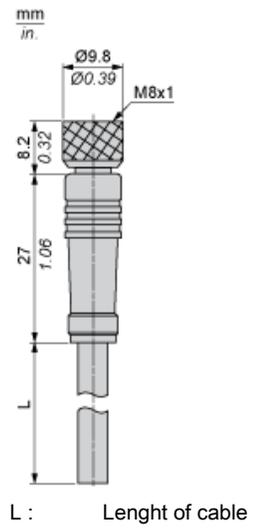

Connections and Schemes

Connector



- BU : Blue
- BN : Brown
- BK : Black