


XU2M18MA230

photoelectric sensor - object - Sn 15 m - NO - cable 2m

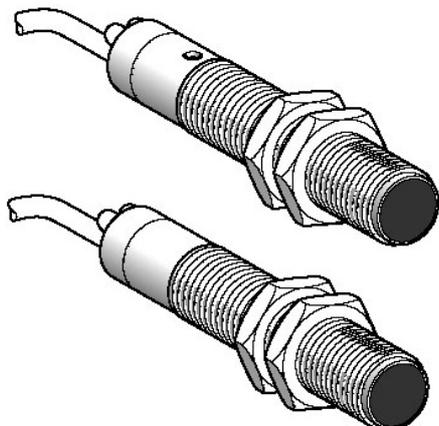

Main

Range of product	OsiSense XU
Series name	Application
Specific application of photoelectric detector	Object
Sensor name	XU2
Sensor design	M18
Material	Metal
Detection system	Thru beam (transmitter supplied)
Emission	Infrared
Line of sight type	Axial
[Sn] nominal sensing distance	15 m
Wiring technique	2 wires
Type of output signal	Discrete
Discrete output function	1 NO
Add on output	Without
Electrical connection	Cable
Cable length	2 m
Wire insulation material	PvR
[Us] rated supply voltage	24...240 V AC/DC
Switching capacity in mA	10...200 mA to be used with 0.4 A quick-blow fuse in series with the load
Diameter	18 mm

Complementary

Electronic sensor type	Photo-electric sensor
Enclosure material	Nickel plated brass
Lens material	PMMA
Maximum sensing distance	20 m
Output type	Solid state
Status LED	1 LED red instability 1 LED yellow output state
Supply circuit type	AC/DC
Supply voltage limits	20...264 V AC/DC
Residual current	< 1,5 mA open state
Switching frequency	<= 25 Hz
Voltage drop	6 V closed state
Delay first up	< 300 ms
Delay response	< 20 ms
Delay recovery	< 20 ms
Setting-up	Sensitivity adjustment
Length	82 mm
Product weight	0,285 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Product certifications	CE CSA UL
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	7 gn +/- 1.5 mm 10...55 Hz IEC 60068-2-6
Shock resistance	30 gn 11 ms IEC 60068-2-27
IP degree of protection	IP67 double insulation IEC 60529
RoHS EUR conformity date	4Q2009
RoHS EUR status	Will be compliant