




DIMENSIONS

Dimensions are approximate and subject to change.

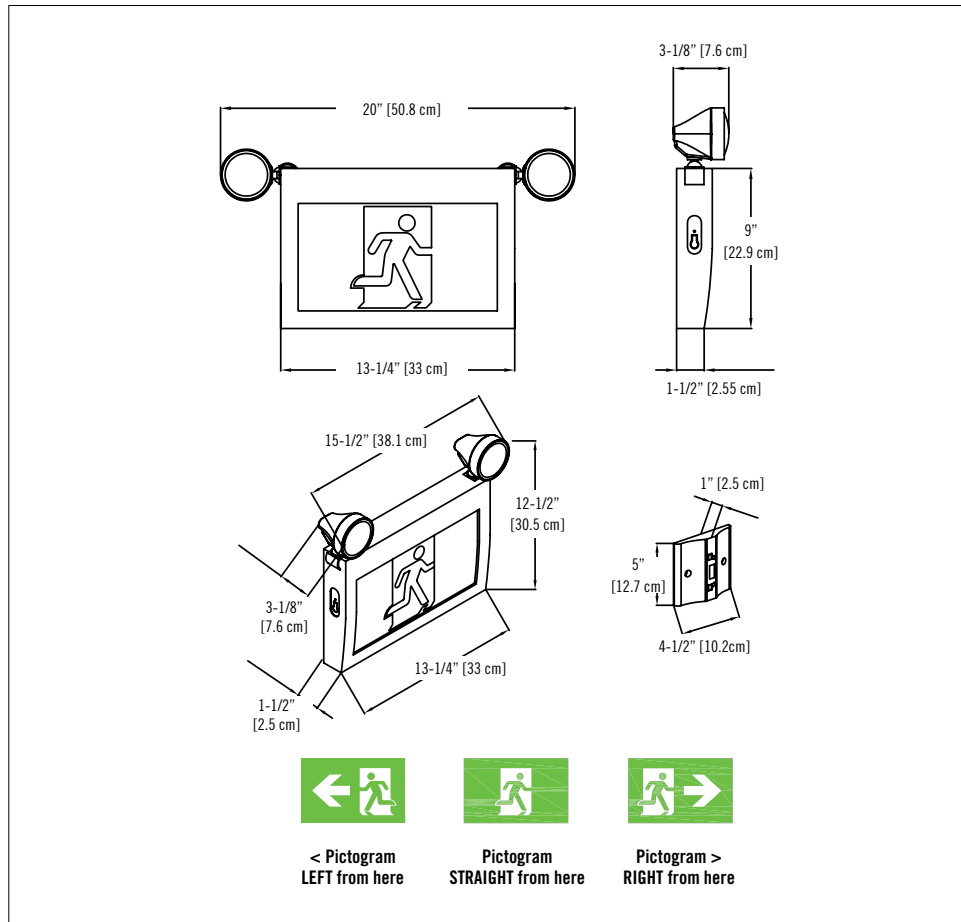

POWER CONSUMPTION AND UNIT RATING

MODEL		AC SPECS		
		WATTAGE	CURRENT	EFFICIENCY
CM-PC	120V, 50/60 Hz	2.5W	0.24A	0.98P
	277V, 50/60 Hz	3W	0.014A	0.93P
	347V, 50/60 Hz	3.5W	0.017A	0.92P

CIRCUITRY

Emergency duration	≥ 2 Hours
Recharge time	24 Hours
Output wattage	CM-PC : 1W+2W*2PC
Light Source	Ultra bright LED
Color temperature	6500K- 7500K
Ni-Cd Battery	CM-PC: 3.6V 1800mAh SC
Product size	415 X 315 X 74/mm

ORDERING INFORMATION

SERIES	VOLTAGE
CM-PC-RL	Blank= 120/347VAC

EXAMPLE: CM-PC-RL



CMPC-RL SERIES

Thermoplastic pictogram
combo unit

FEATURES

- Energy efficient, long-life white LEDs consuming 4.2W at normal operation
- Dual voltage input capability 120/347VAC
- Universal single and double face
- Automatic, temperature compensated, pulse type charger
- Low voltage disconnect prevents over discharge of battery
- Automatic brownout protection
- Battery lock-out prevents discharge during installation
- Comes standard with three pictogram legends for direction selection
- Red LED charger monitor
- Injection-molded off-white thermoplastic ABS housing
- Fast and easy installation with snap-together design
- Ceiling, wall or end mount installation
- CSA C22.2 no.141-10 listed
- 3.6V nickel-cadmium battery provides minimum 120 minutes of emergency lighting
- Fully adjustable LED glare-free lens
- 3.6V-2W long life LED light source
- Adjustable light heads for forward or backward lighting
- Comes standard with 1 year warranty

See warranty details at: www.tnb.ca/en/brands/ready-lite

READY-LITE