



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Complementary

Electrical connection	Elbowed female connector M12, 4 pins
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	6.56 ft (2 m)
Cable outer diameter	0.21 in (5.3 mm)
Cable composition	4 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.20 lb(US) (0.09 kg)

Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3.39 oz (96 g)
Package 1 Height	1.26 in (3.2 cm)

Package 1 width	4.84 in (12.3 cm)
Package 1 Length	5.83 in (14.8 cm)
Unit Type of Package 2	S03
Number of Units in Package 2	40
Package 2 Weight	9.60 lb(US) (4.355 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

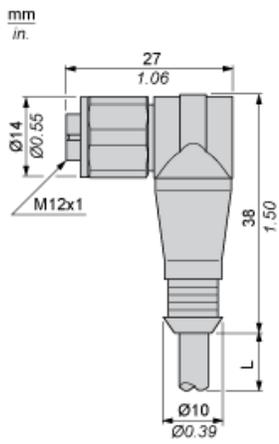

L : Length of cable

Connections and Schemes

Connector



- BN : Brown
- BK : Black
- BU : Blue
- WH : White