



Catalog Number
Notes
Type

Contractor Select™

# FML4W LED Wrap

Linear Flush Mount



A low-profile, linear wraparound with decorative end caps and a frosted polycarbonate diffuser providing widespread, uniform illumination. Ideal for many applications including corridors, kitchens, breakrooms, utility work areas, laundry rooms, basements and stairways.

**FEATURES:**

- ALO6: wraps are switchable between 4,000, 5,000, and 6,000 lumens (MVOLT).
- ZT: 0-10v dimming capable
- All versions rated for 60,000 hour life.
- Operates at 60Hz



Catalog Number	UPC	Description	Nominal Lumens	Input Watts	Voltage	Color Temperature	Pallet qty.
FML4W 48 5000LM 840 ZT MVOLT	194994026815	4' LED Wrap	5000	53.4	120-277V	4000K	44
FML4W 48 ALO6 SEF 840 MVOLT	194994027249	4' LED Wrap	4000, 5000, 6000	50.0	120-277V	4000K	44

Replacement parts	
RK3FML4W LENS	White polycarbonate diffuser



## Specifications

### INTENDED USE:

The FML4W wide housing LED wrap was designed with the renovator in mind. While compatible with new construction, it's no mystery the flexibility of the FML4W will keep renovation simple. A wider housing easily covers up existing blemishes from older fixtures, while the option to adjust lumens grants the perfect amount of light to any room.

All this means the FML4W shines in closets, foyers, hallways, laundry rooms, bedrooms, offices, utility work areas, and more.

### CONSTRUCTION:

The LED wrap is constructed of a metal housing with decorative plastic end caps. The white frosted diffuser provides even illumination and softens the appearance of the LEDs for improved aesthetics.

### OPTICS:

ALO6: wraps are switchable between 4,000, 5,000, and 6,000 lumens (MVOLT). ZT: wraps produce 5,000 lumens (MVOLT). All versions are rated for 60,000 hours life. Thermal formed diffuser is of highly transmissive material to minimize lamp image and provides high-angle brightness control. One piece contemporary design wrap around diffuser softens appearance for improved aesthetics.

### ELECTRICAL:

Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. 85% LED lumen maintenance at 60,000 hours (L85/60,000). Fixture mounts to recessed junction box, electrical connections must be made inside junction box.

### LISTINGS:

CSA certified to US and Canadian standards. Listed for damp locations. Energy Star® certified. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY:

5-year limited warranty. Complete warranty terms located at:


[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## Dimensions

All dimensions are inches (centimeters) unless otherwise indicated.

Width 10 (25.4)  
Length 47 7/8 (121.6)  
Depth 3 (7.62)  
Weight 6.6 lb 2.99kg

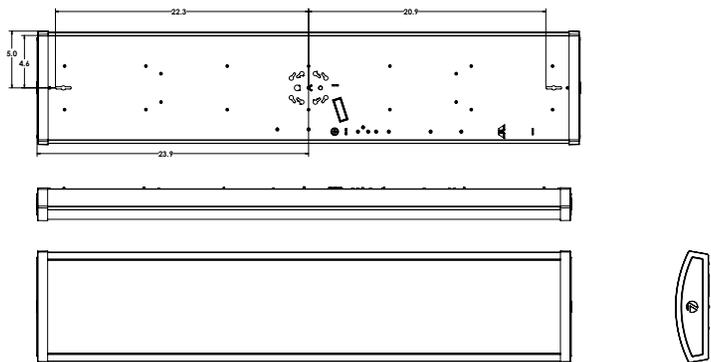

For AL06 configurations