

RE17RMEMU

multifunction relay, Harmony Timer Relays, 8A, 1CO, 0.1s..10 h, power on delay, 24V DC or 24...240V AC DC



Main

| | |
|---------------------------|---|
| Range of Product | Harmony Timer Relays |
| Product or Component Type | Multifunction relay |
| Discrete output type | Relay |
| Width | 0.69 in (17.5 mm) |
| Device short name | RE17R |
| Time delay type | Power on-delay Interval Off-delay Symmetrical flashing |
| Time delay range | 6...60 min 1...10 min 1...10 s 1...10 h 6...60 s 0.1...1 s |
| Nominal output current | 8 A |

Complementary

| | |
|--------------------------------|--|
| Contacts type and composition | 1 C/O |
| Contacts material | Cadmium free |
| Height | 3.54 in (90 mm) |
| Depth | 2.83 in (72 mm) |
| Control type | Selector switch front panel |
| [Us] rated supply voltage | 24...240 V AC 50/60 Hz 24 V DC |
| Voltage range | 0.85...1.1 Us |
| Supply frequency | 50...60 Hz +/- 5 % |
| Release of input voltage | 10 V |
| Connections - terminals | Screw terminals, 1 x 0.5...1 x 3.3 mm ² AWG 20...AWG 12) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² AWG 24...AWG 14) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² AWG 24...AWG 16) flexible with cable end |
| Tightening torque | 5.31...8.85 lbf.in (0.6...1 N.m) IEC 60947-1 |
| Housing material | Self-extinguishing |
| Repeat accuracy | +/- 0.5 % IEC 61812-1 |
| Temperature Drift | +/- 0.05 %/°C |
| Voltage drift | +/- 0.2 %/V |
| Setting accuracy of time delay | +/- 10 % of full scale 25 °C IEC 61812-1 |
| Control signal pulse width | 100 ms with load in parallel typical 30 ms typical |
| Insulation resistance | 100 MOhm 500 V DC IEC 60664-1 |
| Reset time | 120 ms on de-energisation typical |
| On-load factor | 100 % |
| Power consumption in VA | 0...32 VA 240 V AC |
| Maximum power consumption in W | 0.6 W 24 V DC |
| Minimum switching current | 10 mA 5 V DC |
| Maximum switching current | 8 A AC/DC |

| | |
|--|---|
| Maximum switching voltage | 250 V AC |
| Breaking capacity | 2000 VA |
| Operating frequency | 10 Hz |
| Electrical durability | 100000 cycles resistive 8 A 250 V AC |
| Mechanical durability | 10000000 cycles |
| Dielectric strength | 2.5 kV 1 mA/1 minute 50 Hz IEC 61812-1 |
| [Uimp] rated impulse withstand voltage | 5 kV 1.2/50 µs |
| Power on delay | 100 ms |
| Marking | CE |
| Creepage distance | 4 kV/3 IEC 60664-1 |
| Safety reliability data | MTTFd = 296.8 years B10d = 270000 |
| Mounting position | Any position in relation to normal vertical mounting plane |
| Mounting support | 35 mm DIN rail conforming to IEC 60715 |
| Local signalling | LED indicator on steady: relay energised, no timing in progress LED indicator 80 % ON and 20 % OFF flashing: timing in progress LED indicator 5 % ON and 95 % OFF pulsing: relay de-energised, no timing in progress (except function Di-D, Li-L) |
| Net Weight | 0.15 lb(US) (0.07 kg) |
| Time delay type | A, At, B, C, D, Di, H, Ht |
| Functionality | Multifunction |
| Compatibility code | RE17 |

Environment

| | |
|---------------------------------------|---|
| Immunity to microbreaks | 20 ms |
| Standards | 2004/108/EC IEC 61000-6-2 IEC 61000-6-3 IEC 61000-6-1 2006/95/EC IEC 61812-1 IEC 61000-6-4 |
| Product Certifications | CSA[RETURN]cULus |
| Ambient Air Temperature for Storage | -22...140 °F (-30...60 °C) |
| Ambient Air Temperature for Operation | -4...140 °F (-20...60 °C) |
| IP degree of protection | IP20 IEC 60529 terminal block) IP40 IEC 60529 housing) IP50 IEC 60529 front panel) |
| Vibration resistance | 20 m/s² 10...150 Hz)IEC 60068-2-6 |
| Shock resistance | 15 gn 11 ms IEC 60068-2-27 |
| Relative Humidity | 93 % without condensation IEC 60068-2-30 |
| Electromagnetic compatibility | Electrostatic discharge immunity test 6 kV in contact) level 3 IEC 61000-4-2 Electrostatic discharge immunity test 8 kV in air) level 3 IEC 61000-4-2 Susceptibility to electromagnetic fields 10 V/m 80 MHz to 1 GHz) level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test 1 kV capacitive connecting clip) level 3 IEC 61000-4-4 Electrical fast transient/burst immunity test 2 kV direct) level 3 IEC 61000-4-4 1.2/50 µs shock waves immunity test 1 kV differential mode) level 3 IEC 61000-4-5 1.2/50 µs shock waves immunity test 2 kV common mode) level 3 IEC 61000-4-5 Conducted RF disturbances 10 V 0.15...80 MHz) level 3 IEC 61000-4-6 Voltage dips and interruptions immunity test 0 % 1 cycle) IEC 61000-4-11 Voltage dips and interruptions immunity test 70 % 25/30 cycles) IEC 61000-4-11 Conducted and radiated emissionsclass B EN 55022 |

Ordering and shipping details

| | |
|-------------------|-------------------------------------|
| Category | 22370-RE, RM MISC TIMERS & COUNTERS |
| Discount Schedule | CP2 |
| GTIN | 3606480552731 |
| Returnability | Yes |
| Country of origin | ID |


Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.10 in (2.800 cm) |
| Package 1 Width | 3.07 in (7.800 cm) |
| Package 1 Length | 3.78 in (9.600 cm) |
| Package 1 Weight | 2.75 oz (78.000 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 40 |
| Package 2 Height | 5.91 in (15.000 cm) |
| Package 2 Width | 11.81 in (30.000 cm) |
| Package 2 Length | 15.75 in (40.000 cm) |
| Package 2 Weight | 8.25 lb(US) (3.740 kg) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |


Width 17.5 mm

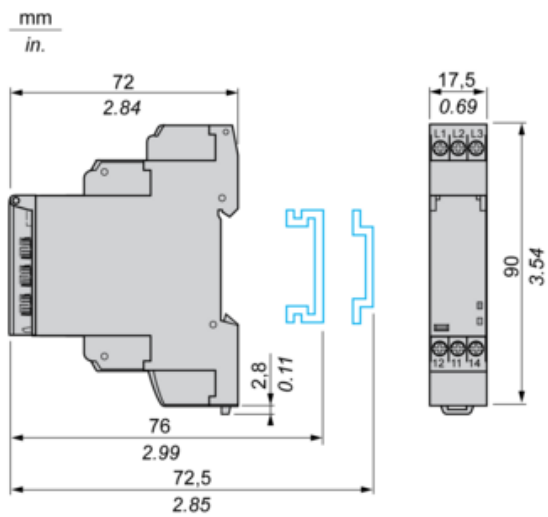

Internal Wiring Diagram

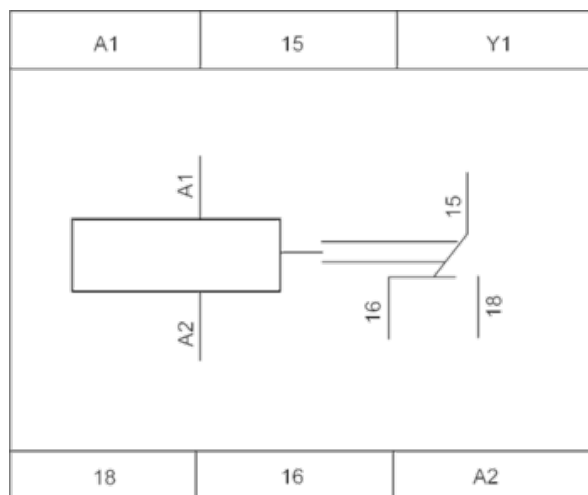

Wiring Diagram

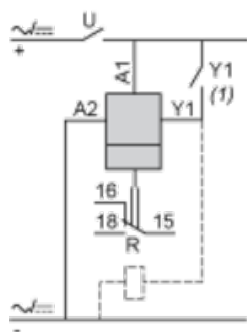

1) Contact Y1:

- Control for functions B, C, Ac, Bw, Ad, Ah, N, O, W, T, Tt.
- Partial stop for functions At, Ht and Pt.
- Function D if Di selected.
- Not used for functions A, H and P.

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

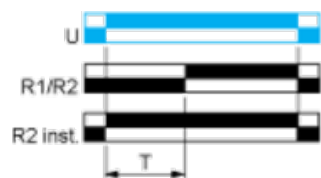


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact C starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

Function: 1 Output




$T = t_1 + t_2 + \dots$

Function B : Interval Relay with Control Signal

Description

After power-up, pulsing or maintaining control contact C starts the timing T. The output R closes for the duration of the timing period T then reverts to its initial state.

Function: 1 Output




Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D: Symmetrical Flashing Relay (Starting Pulse Off)


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output




Function: 2 Outputs



Function: 1 Output with Retrigger / Restart Control



Function: 2 Output with Retrigger / Restart Control



Function Di : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output




$$T = t1 + t2 + \dots$$

Function: 2 Outputs




$$T = t1 + t2 + \dots$$

Function: 1 Output with Retrigger / Restart Control



$$T = t1 + t2 + \dots$$

Function: 2 Outputs with Retrigger / Restart Control



$$T = t1 + t2 + \dots$$

Legend

Relay de-energised

Relay energised

 Output open

 Output closed

| | |
|---|-----------------|
| C | Control contact |
|---|-----------------|

| | |
|----------|--|
| G | Gate |
| R | Relay or solid state output |
| R1/R2 | 2 timed outputs |
| R2 inst. | The second output is instantaneous if the right position is selected |
| T | Timing period |
| Ta - | Adjustable On-delay |
| Tr - | Adjustable Off-delay |
| U | Supply |