


# NSYMF86

Microperforated mounting plate H800xW600 w/  
holes diam 3,6mm on 12,5mm pitch

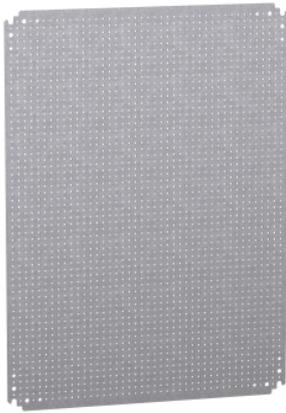

## Main

Range	Spacial
Accessory / separate part category	Mounting accessory
Product or Component Type	Mounting plate
Device Application	Multi-purpose
Enclosure nominal dimensions	- H: 31.50 in (800 mm) W: 23.62 in (600 mm)
Mounting Location	Step slide Direct fixing on backstuds
Mounting plate description	Microperforated
Range compatibility	Spacial Spacial S3D Spacial Spacial CRN Spacial Spacial S3X Thalassa Thalassa PLM
Quantity per Set	Set of 1
Material	Galvanised steel

## Complementary

Fixing mode	Screwed on backstuds M8 By fixing element
Permanent permissible load	297.62 lb(US) (135 kg)
Height	30.12 in (765 mm)
Width	21.65 in (550 mm)
Depth	4.92 in (125 mm)
Thickness	0.10 in (2.5 mm)
Net Weight	17.20 lb(US) (7.8 kg)
Variant particularity	With enclosures H800 x W1200 Installation in enclosures with inverted dimensions

## Ordering and shipping details

Category	80036-ENCLOSURE SYSTEMS ACCESSORIES
Discount Schedule	ES1
GTIN	3606480183126
Returnability	Yes
Country of origin	ES

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.12 in (0.3 cm)
Package 1 Width	21.85 in (55.5 cm)
Package 1 Length	30.12 in (76.5 cm)
Package 1 Weight	16.91 lb(US) (7.67 kg)
Unit Type of Package 2	PAM
Number of Units in Package 2	80
Package 2 Height	12.20 in (31.0 cm)
Package 2 Width	39.37 in (100.0 cm)

Package 2 Length	47.24 in (120.0 cm)
Package 2 Weight	1470.48 lb(US) (667.0 kg)

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations

### Contractual warranty

Warranty	18 months
----------	-----------