



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

### Complementary

Electrical connection	Straight female connector M12, 4 pins
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	32.81 ft (10 m)
Cable outer diameter	0.21 in (5.3 mm)
Cable composition	4 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 μOhm
Minimum insulating resistance	1 GΩ
Net weight	0.82 lb(US) (0.37 kg)

### Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	14.74 oz (418 g)
Package 1 Height	1.85 in (4.7 cm)

---

Package 1 width	6.54 in (16.6 cm)
Package 1 Length	6.61 in (16.8 cm)

---

**Offer Sustainability**

---

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

---


**Contractual warranty**

---

Warranty	18 months
----------	-----------

---

Dimensions

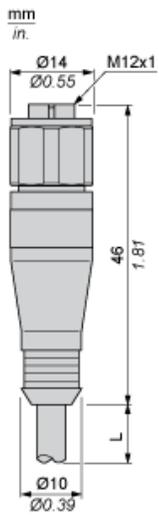


L : Length of cable

---

Connections and Schemes

---

Connector



- BN : Brown
- BK : Black
- BU : Blue
- WH : White