

Type	S3-B 3-pole, 1 connection level Coding ring optional Integrated retaining clip and labelling space
-------------	--

Rated current	10 A
----------------------	-------------

Specifications

Rated load	10 A / 250 V
Insulation	Test voltage V rms / 1 min
All terminals/DIN rail	2,5 kV
– Terminal/terminal	2,5 kV
Cross-section of connecting wire	
– Single-wire	4 mm ² or 2 x 2,5 mm ²
– Multi-wire	22 - 14 AWG
Max. screw torque	0.7 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C3
Labelling space	detachable
Connection label	1... 11; DIN/EN
Mounting	DIN rail T35 or mounting plate
Ambient temperature	-40 (no ice)...60 °C / -40 ... 80 °C
Weight	55g

Associated, plug-in 11-pin MRC relays

Suitable for holding the Releco coding ring
For coding the relay and the socket.

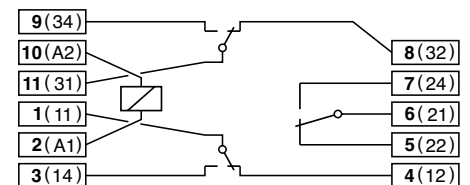
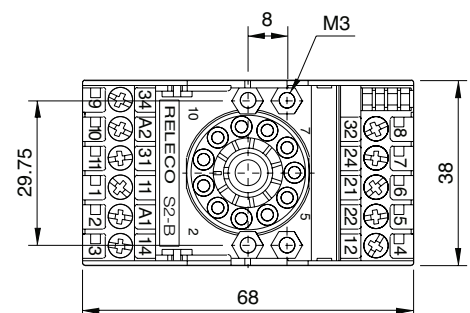
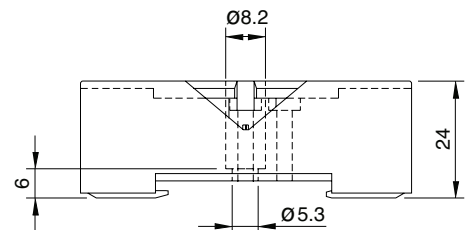
**C3-A, C3-G, C3-T, C3-X, C3-M, C3-R,
C3-E, C3-N, C3-S**

Accessories**Coding ring, blue set:**

Retaining spring, steel
Retaining clip, plastic

S3-BC

Packaging unit: 5 pcs
S3-C, S3-CT (with Timecube)
CP-15B

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**

EN 60947-1, EN 61810-1